


PARTS CATALOGUE
FOR THE
K-10
PANEL CUTTER

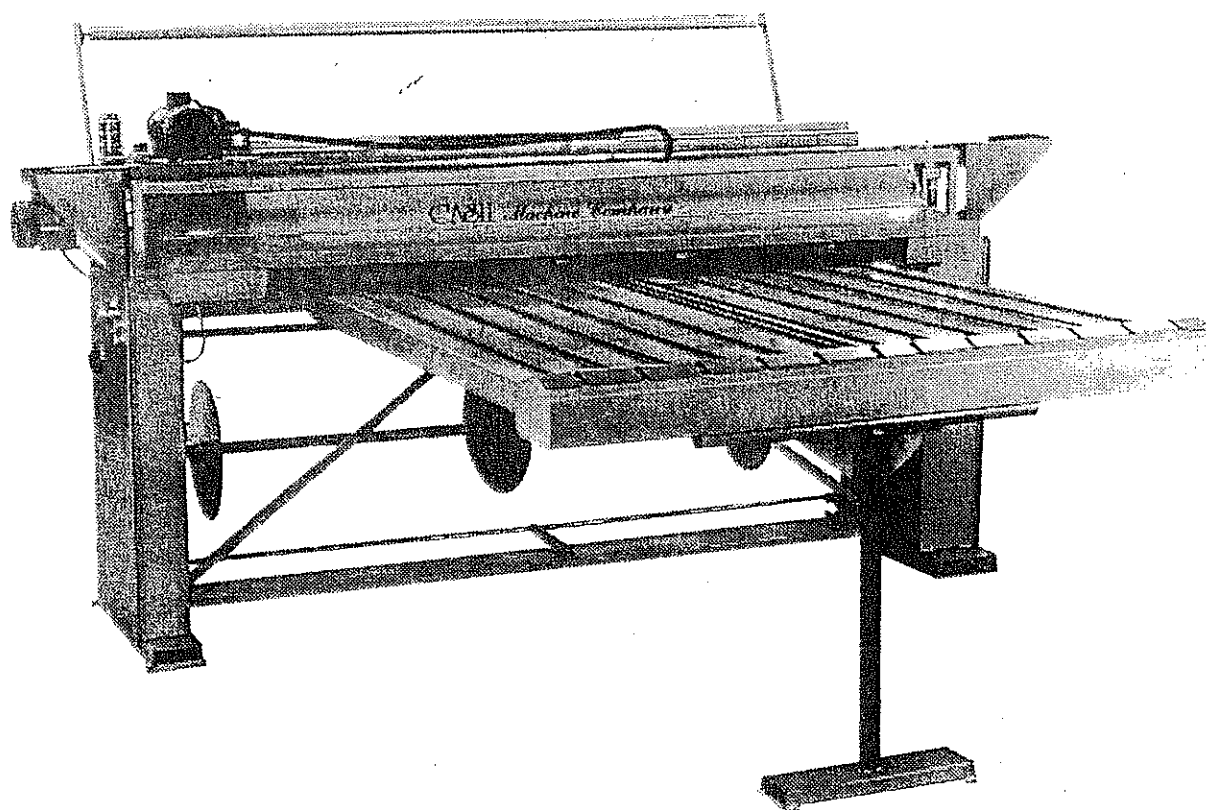


CASH Machine Company


Invest in the best!


100 Outer Loop
Louisville, Kentucky U.S.A. 40214


(502) 361-1726


FAX: (502) 361-4287

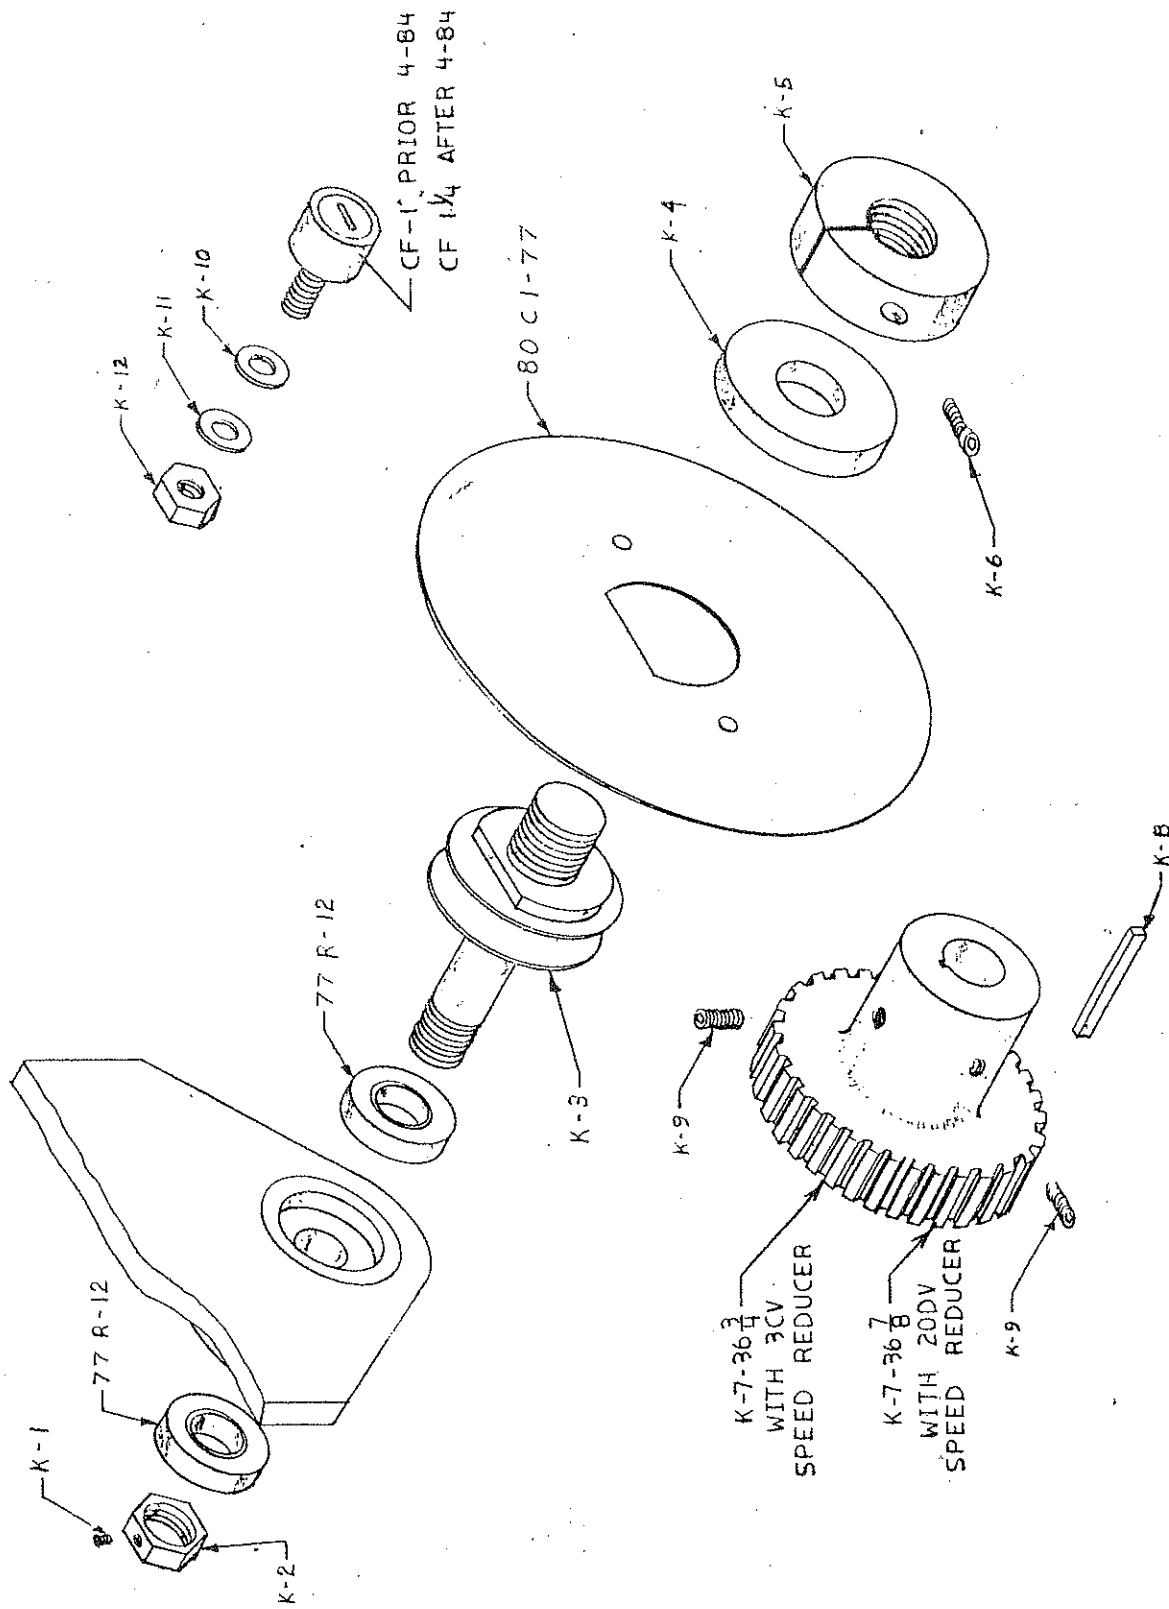


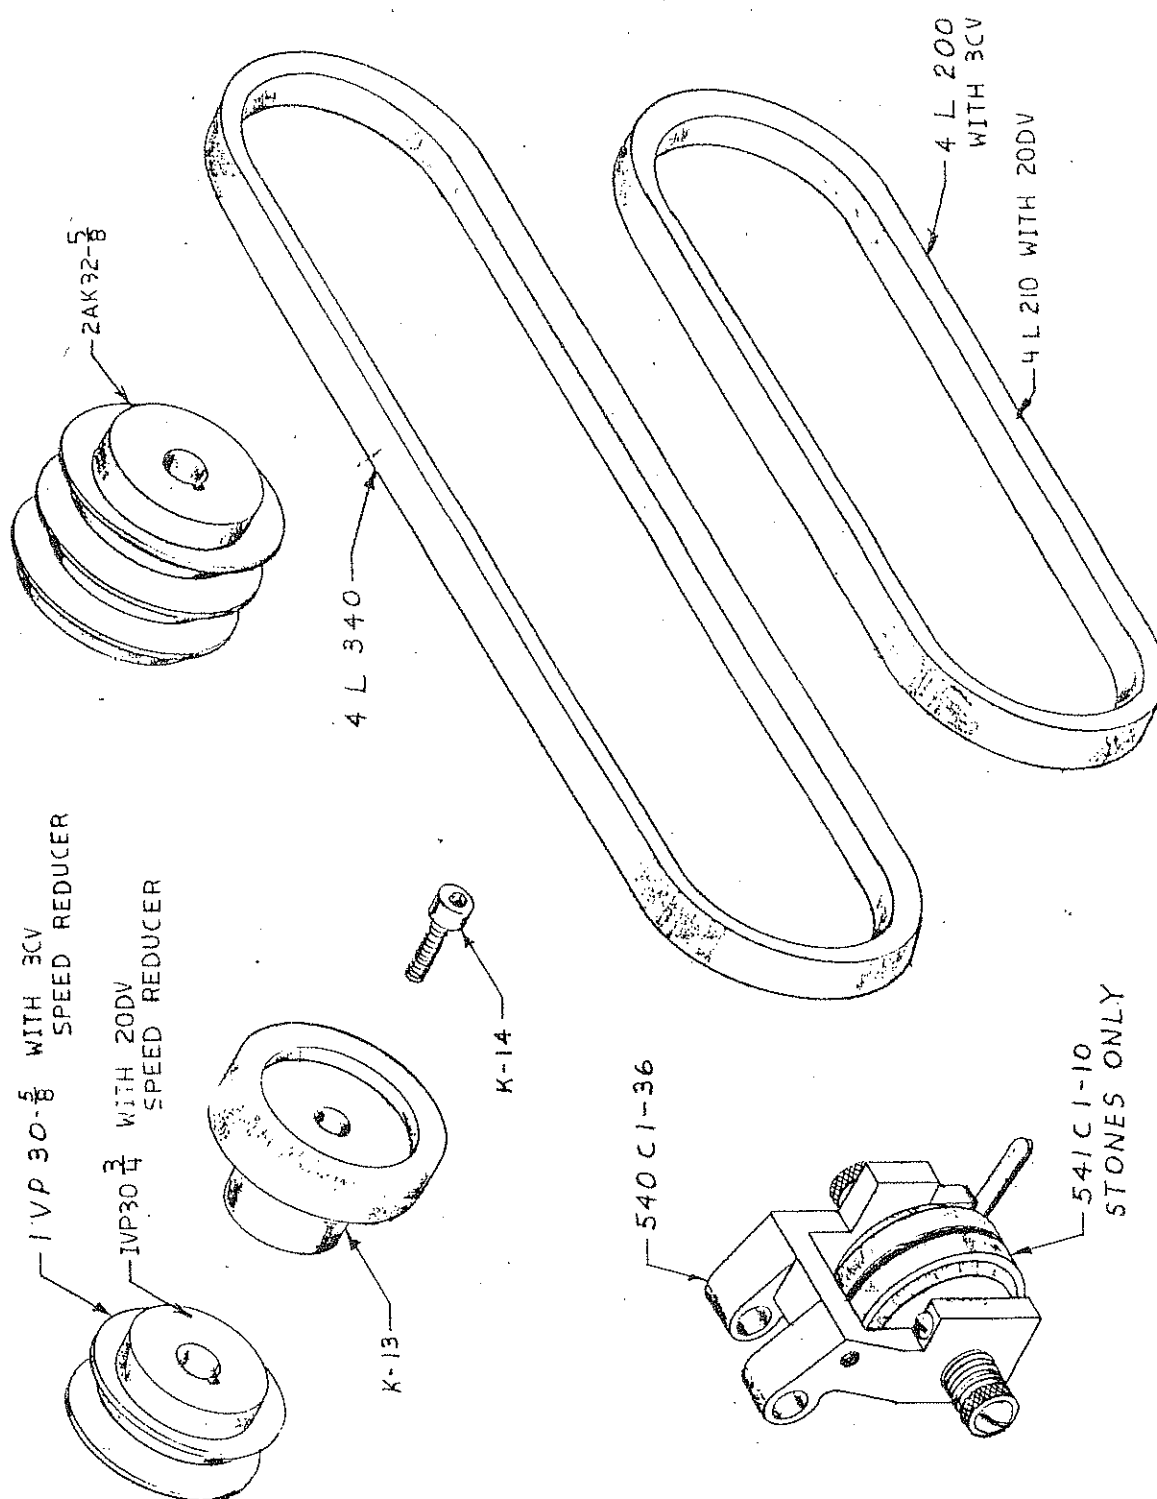


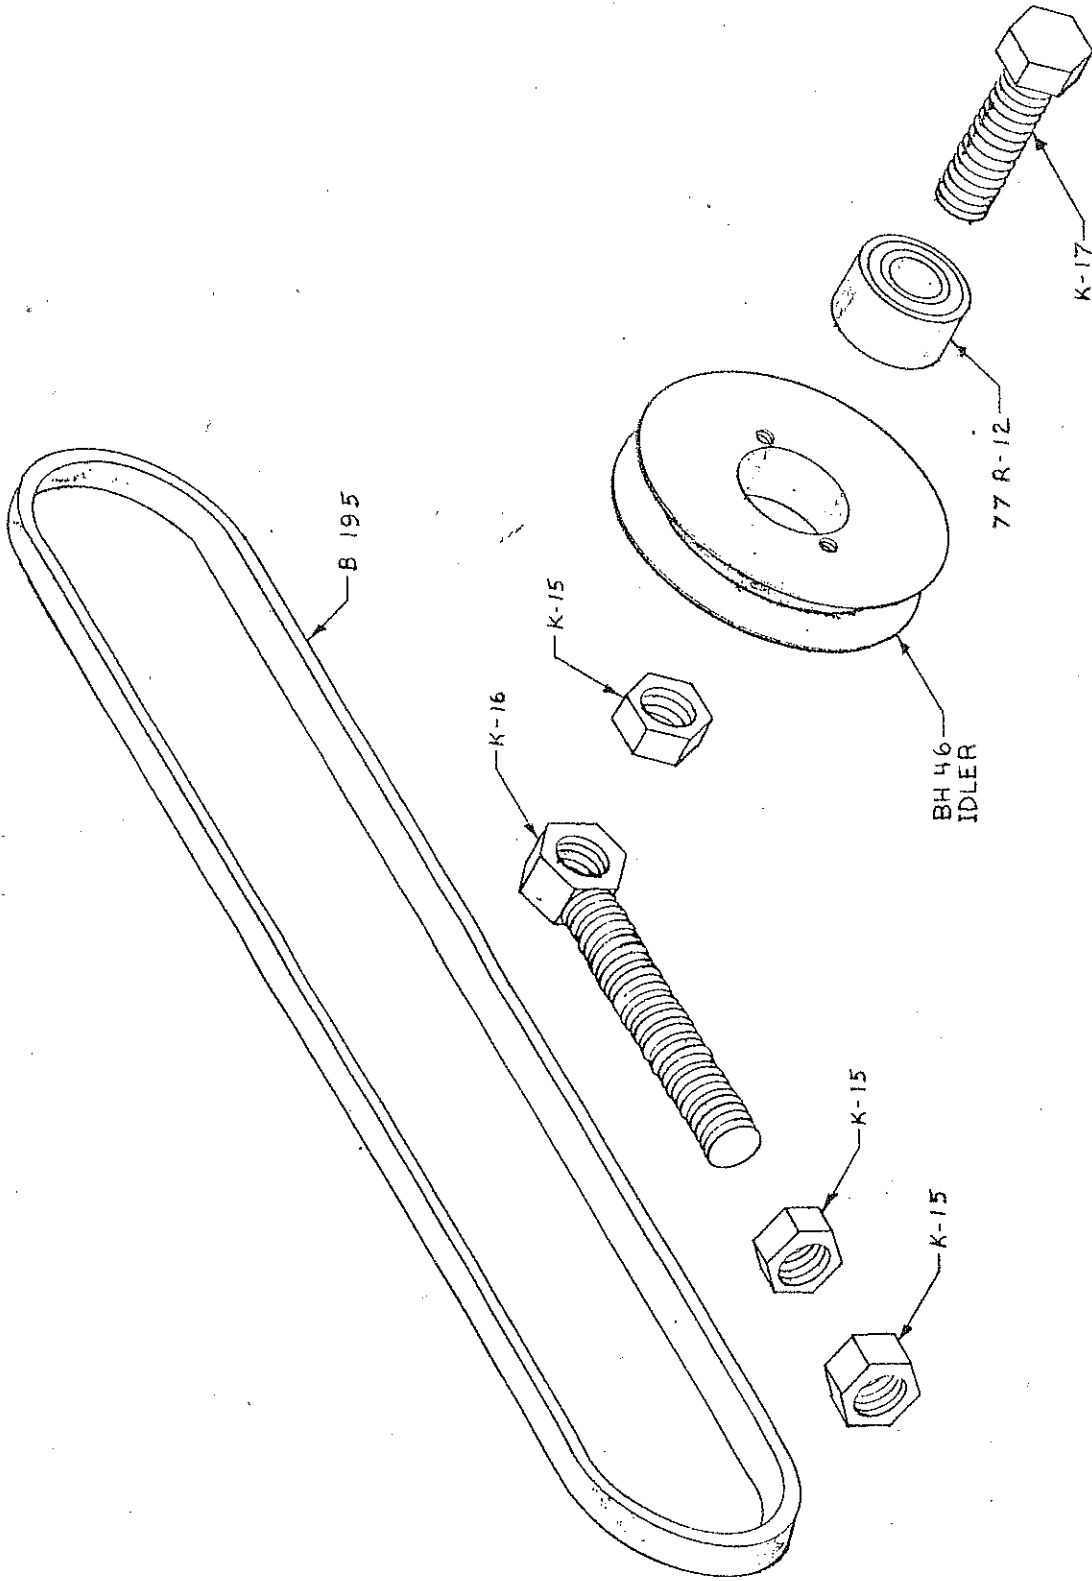


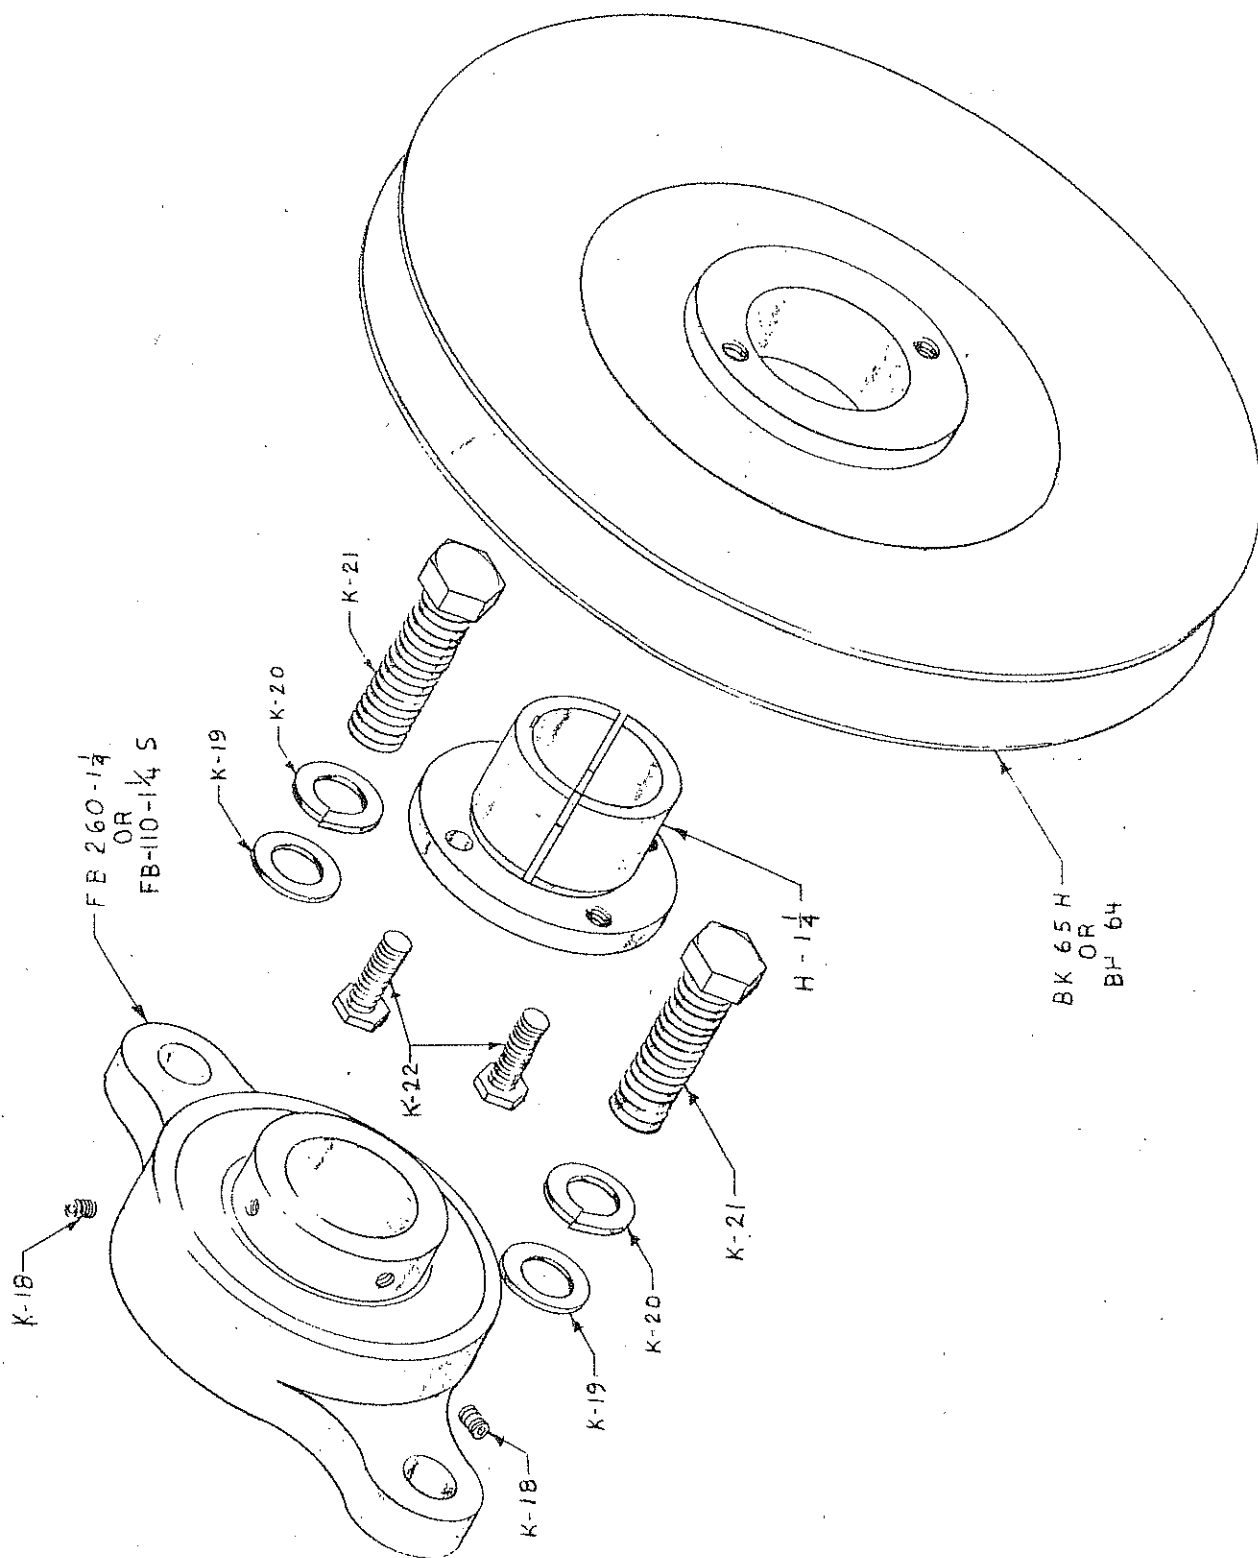


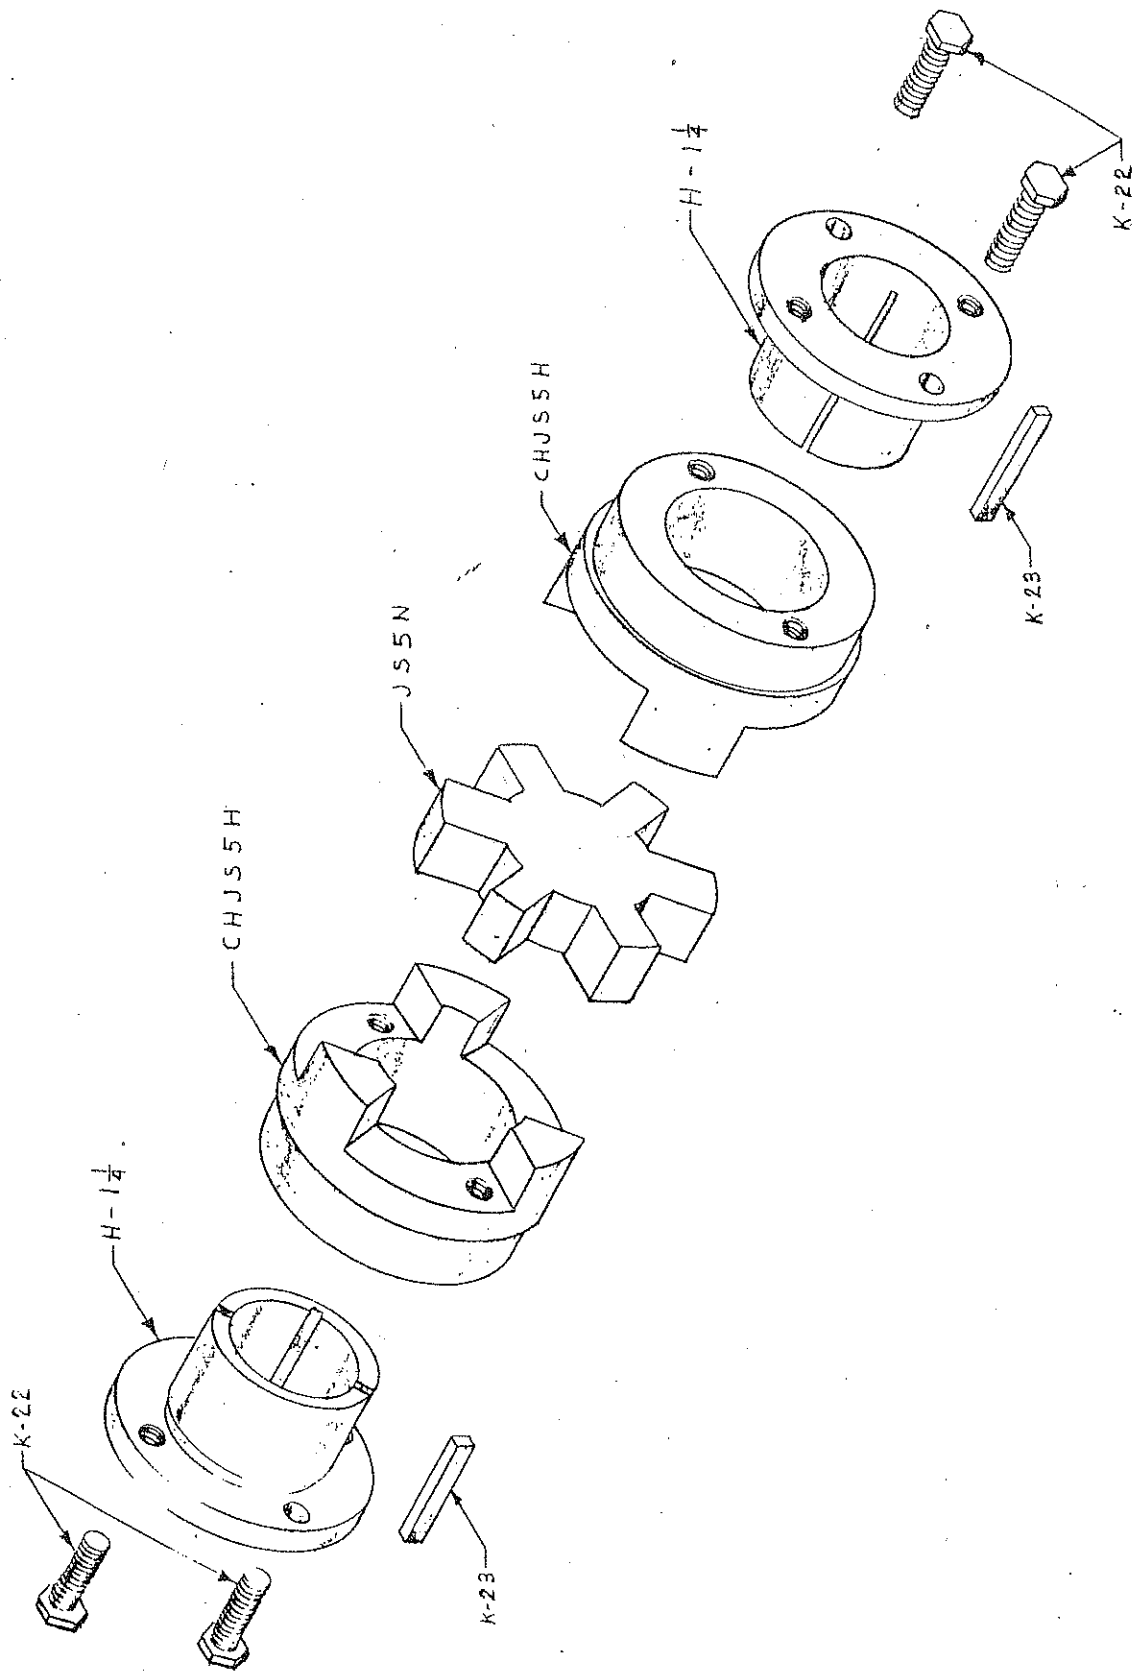




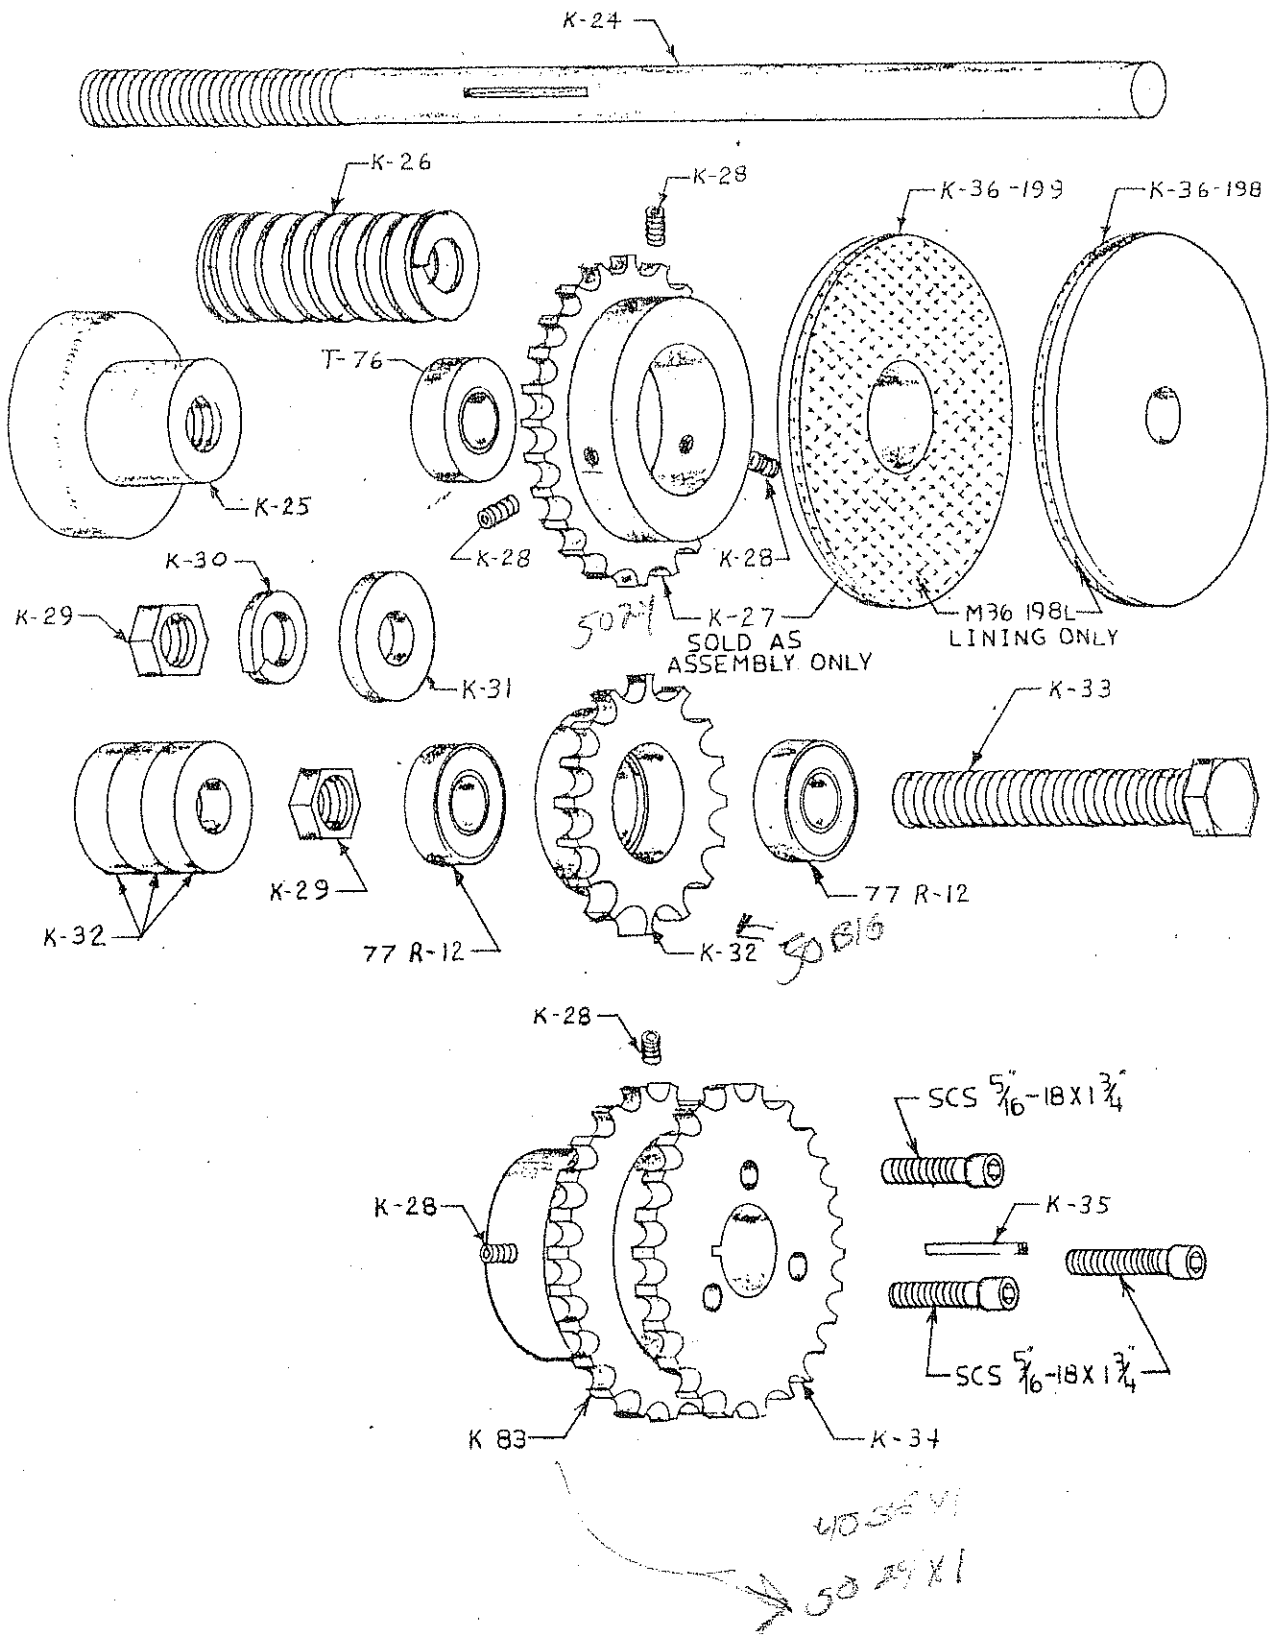





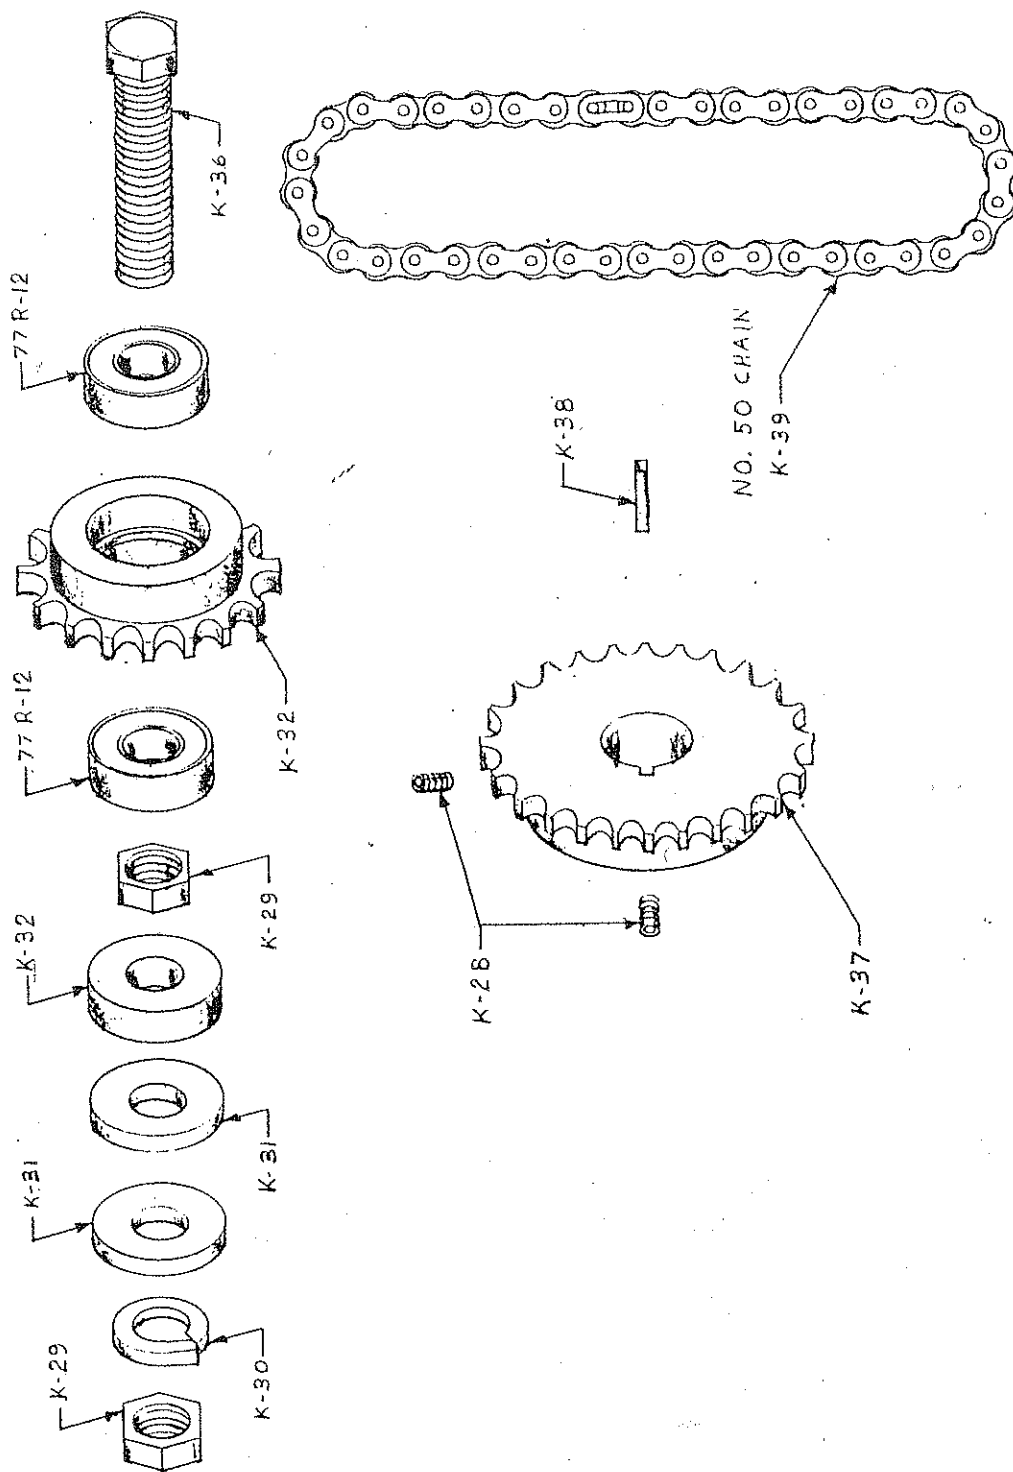


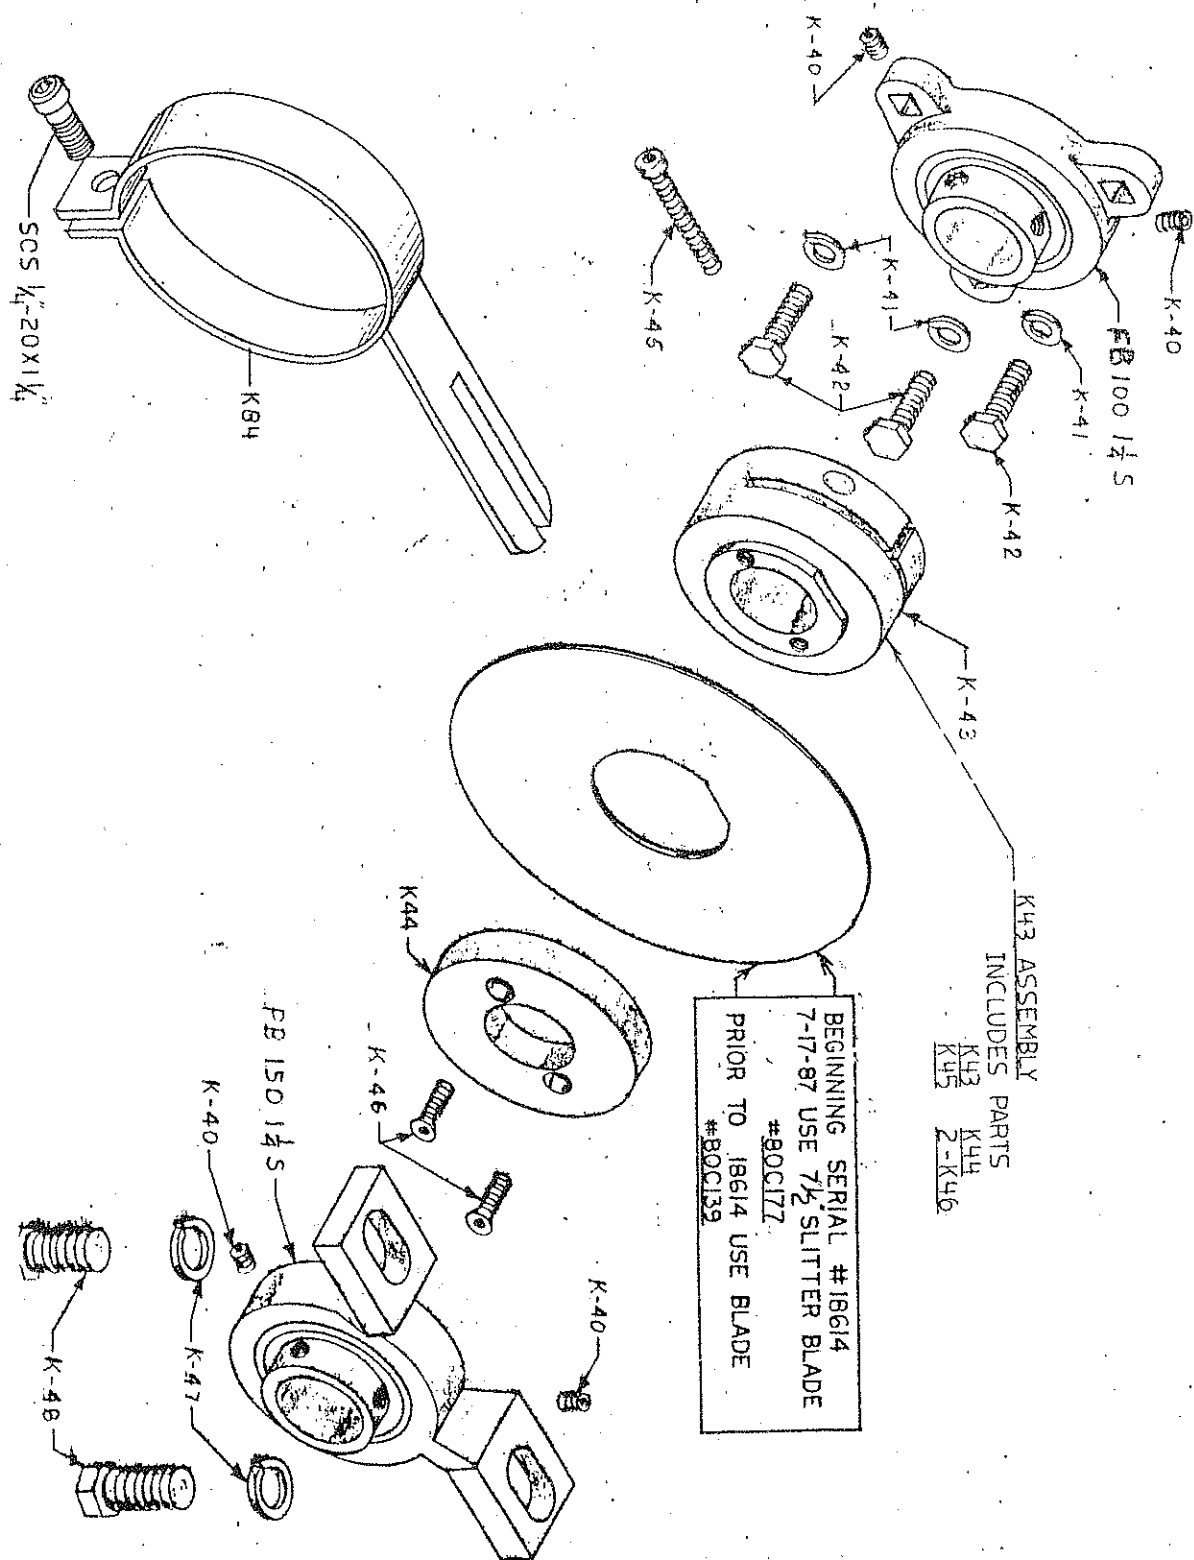

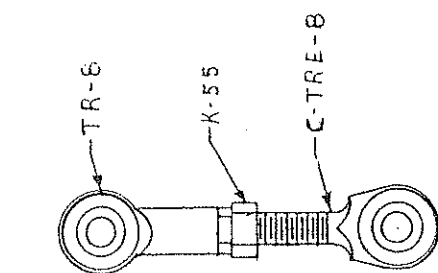

NO. 40 DOUBLE
CHAIN
K-56

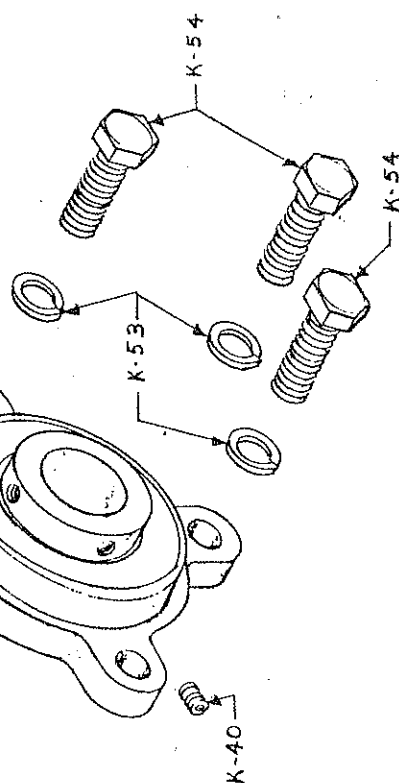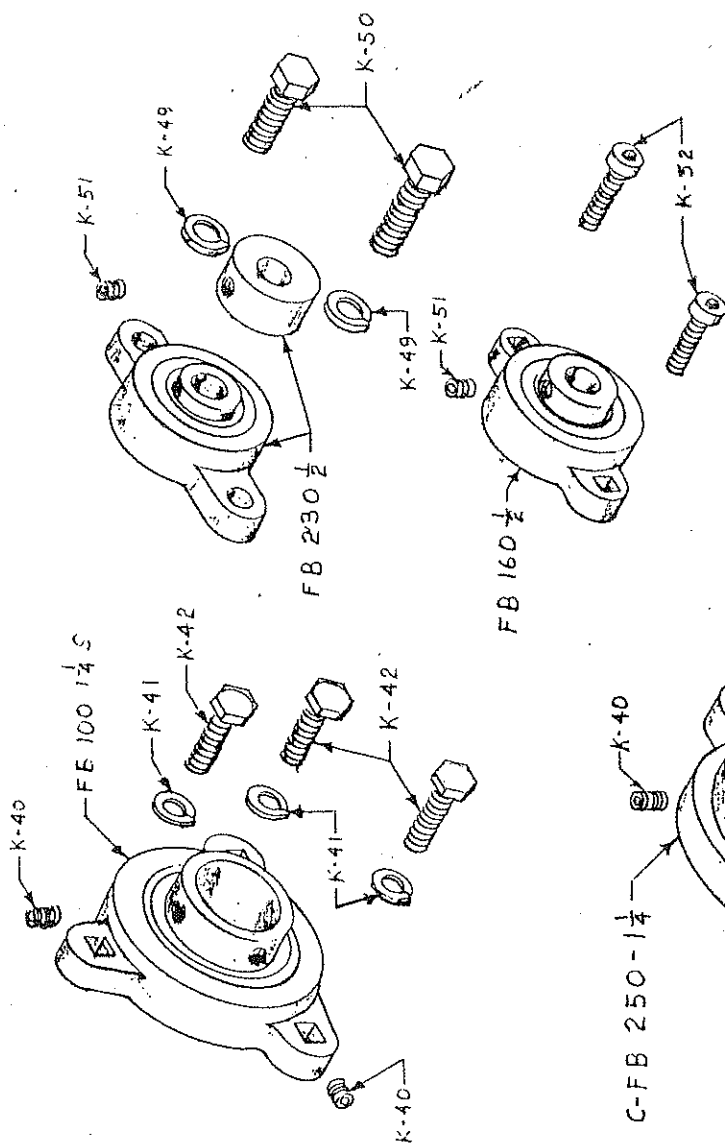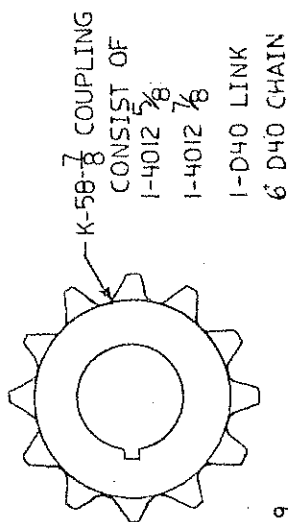

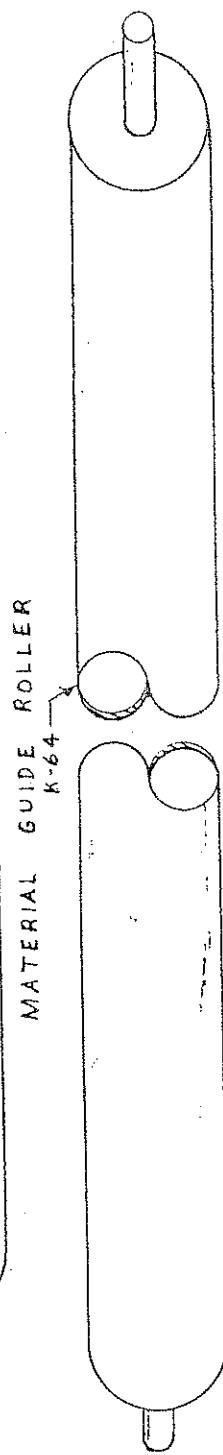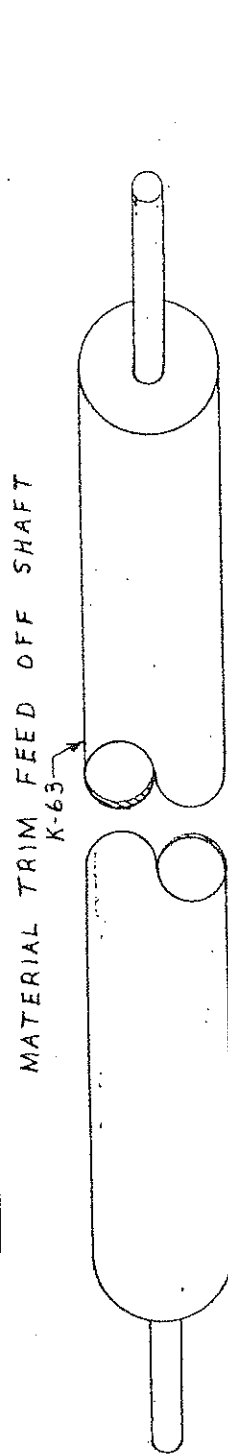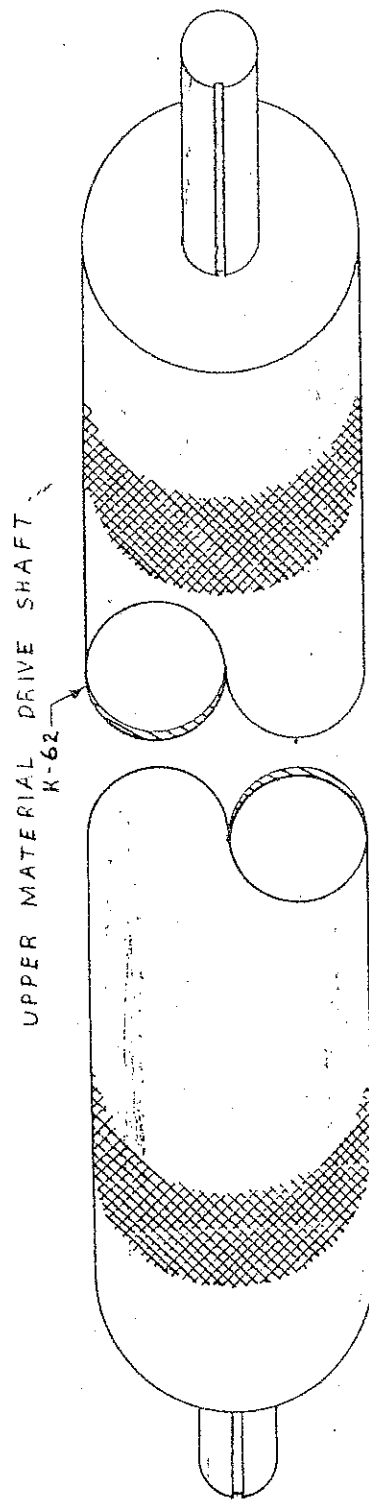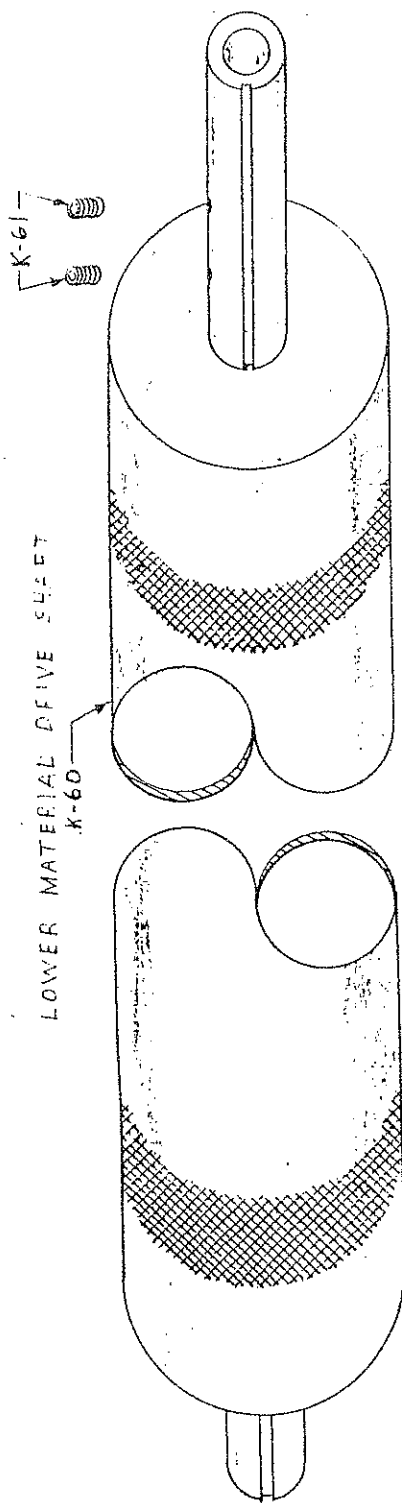

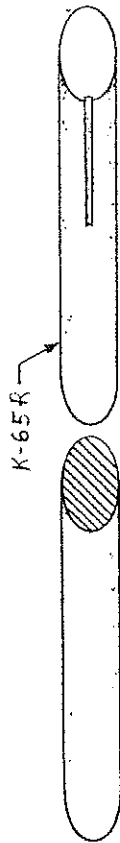


TABLE DRIVE SHAFT RIGHT SIDE






TABLE DRIVE SHAFT LEFT SIDE

BEGINNING SERIAL # 18435

K67HW




CUTTING BLADE SHAFT


106" BEGINNING 5/27/83

SERIAL # 18039

102" PRIOR 5/27/83




SCS 5/16-18X2"

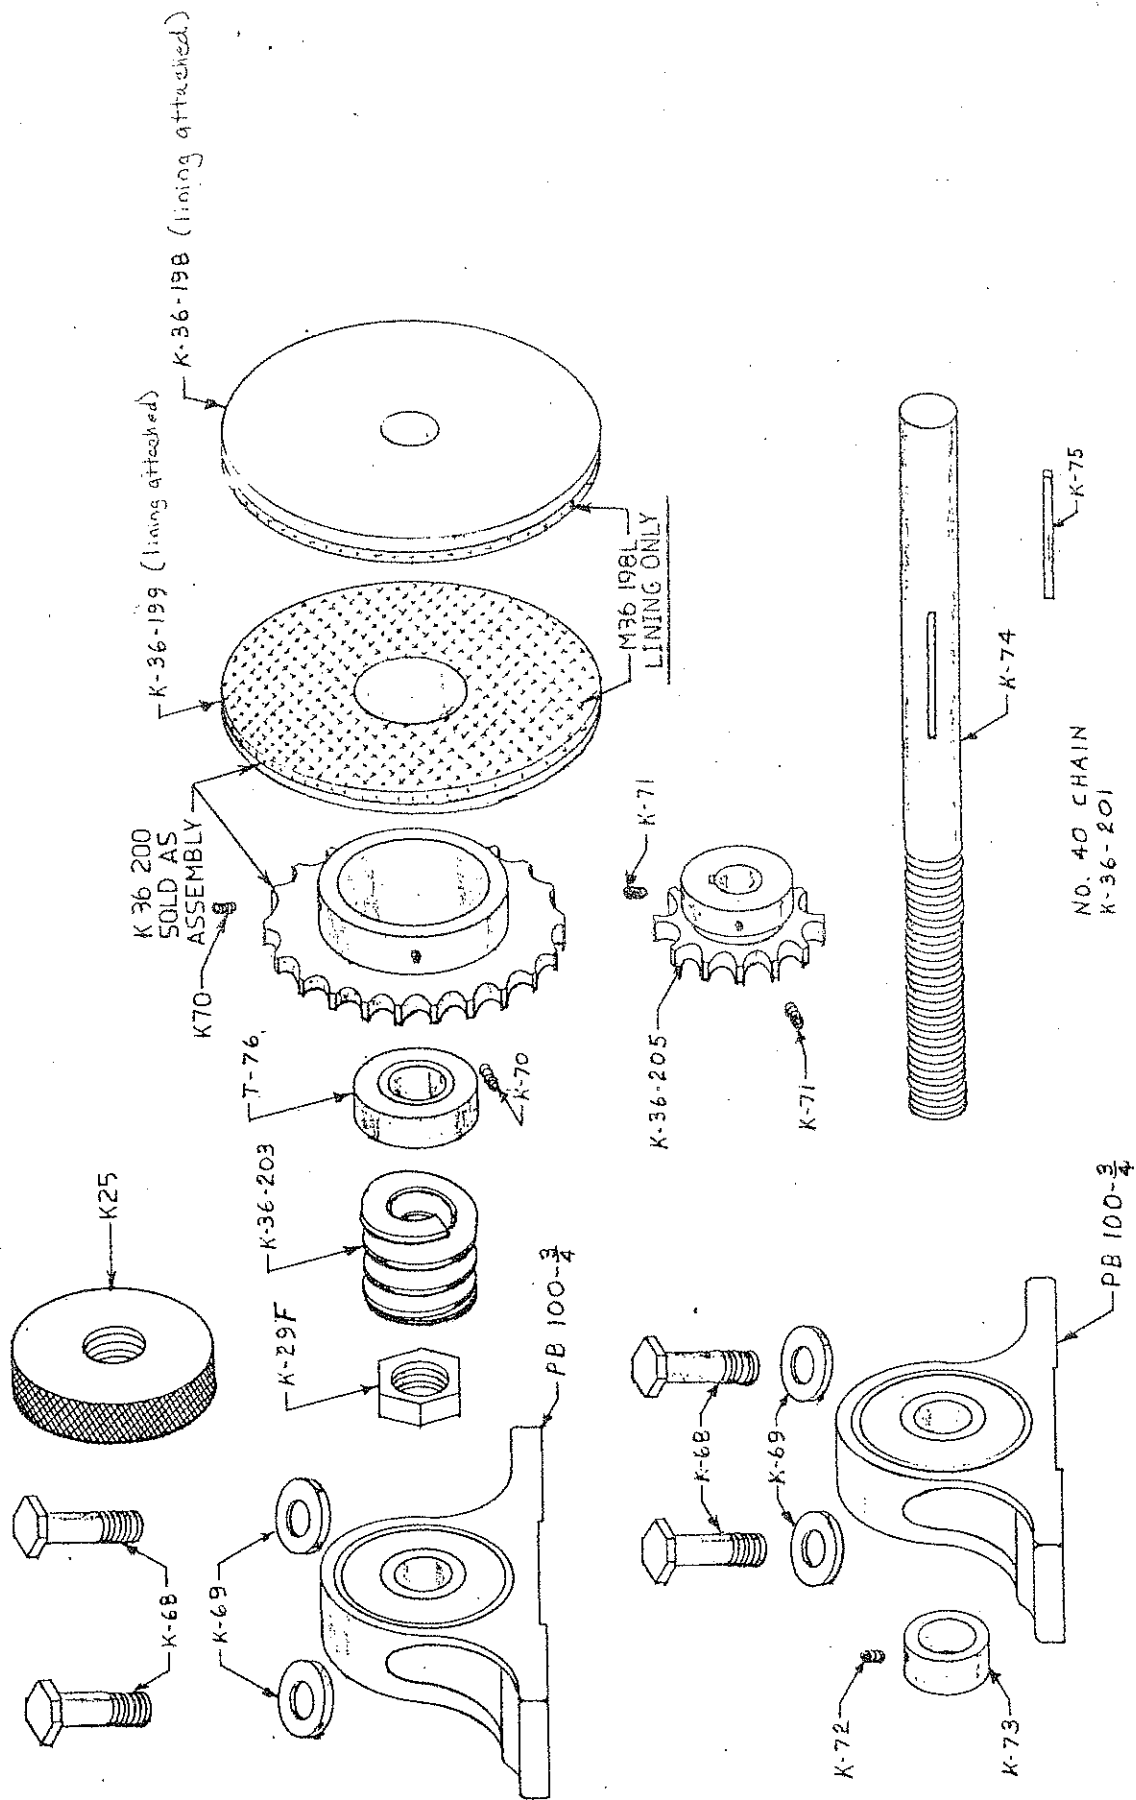


BORDER WIND-UP REEL SHAFT

K-36-280





K-76




RB-12


K-36-297

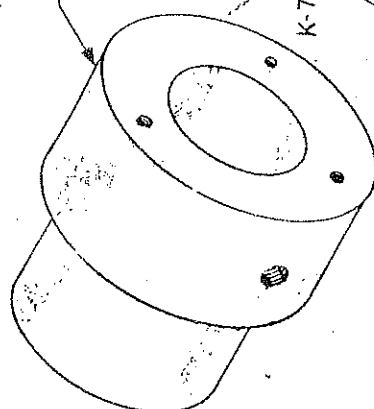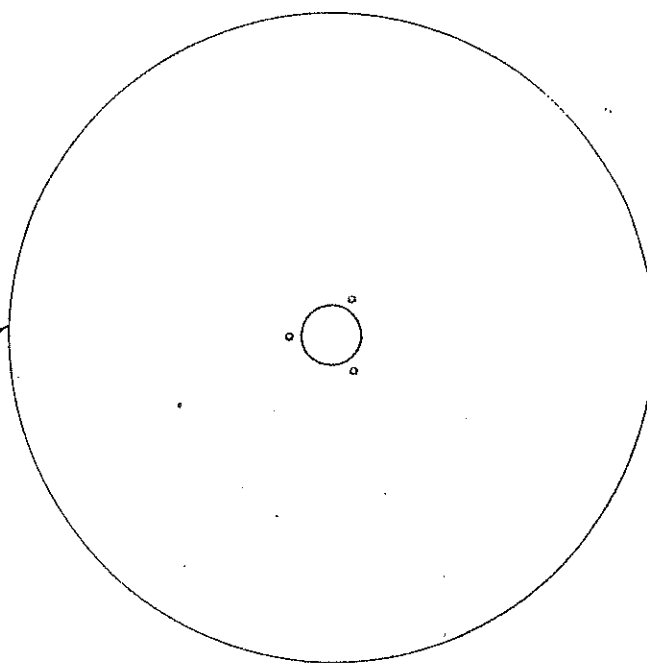


K-36-276



K-77

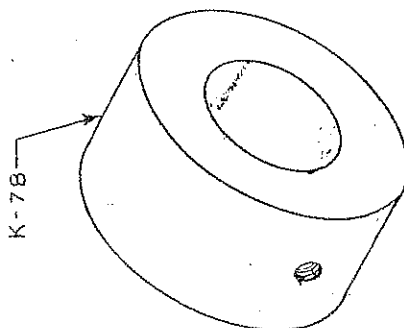


K-78

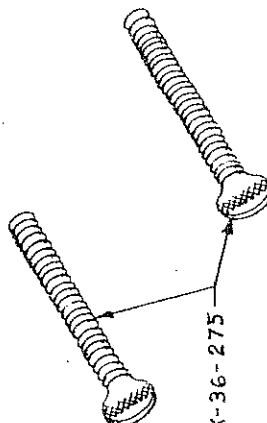



K-36-275




UJ16S
MODIFIED

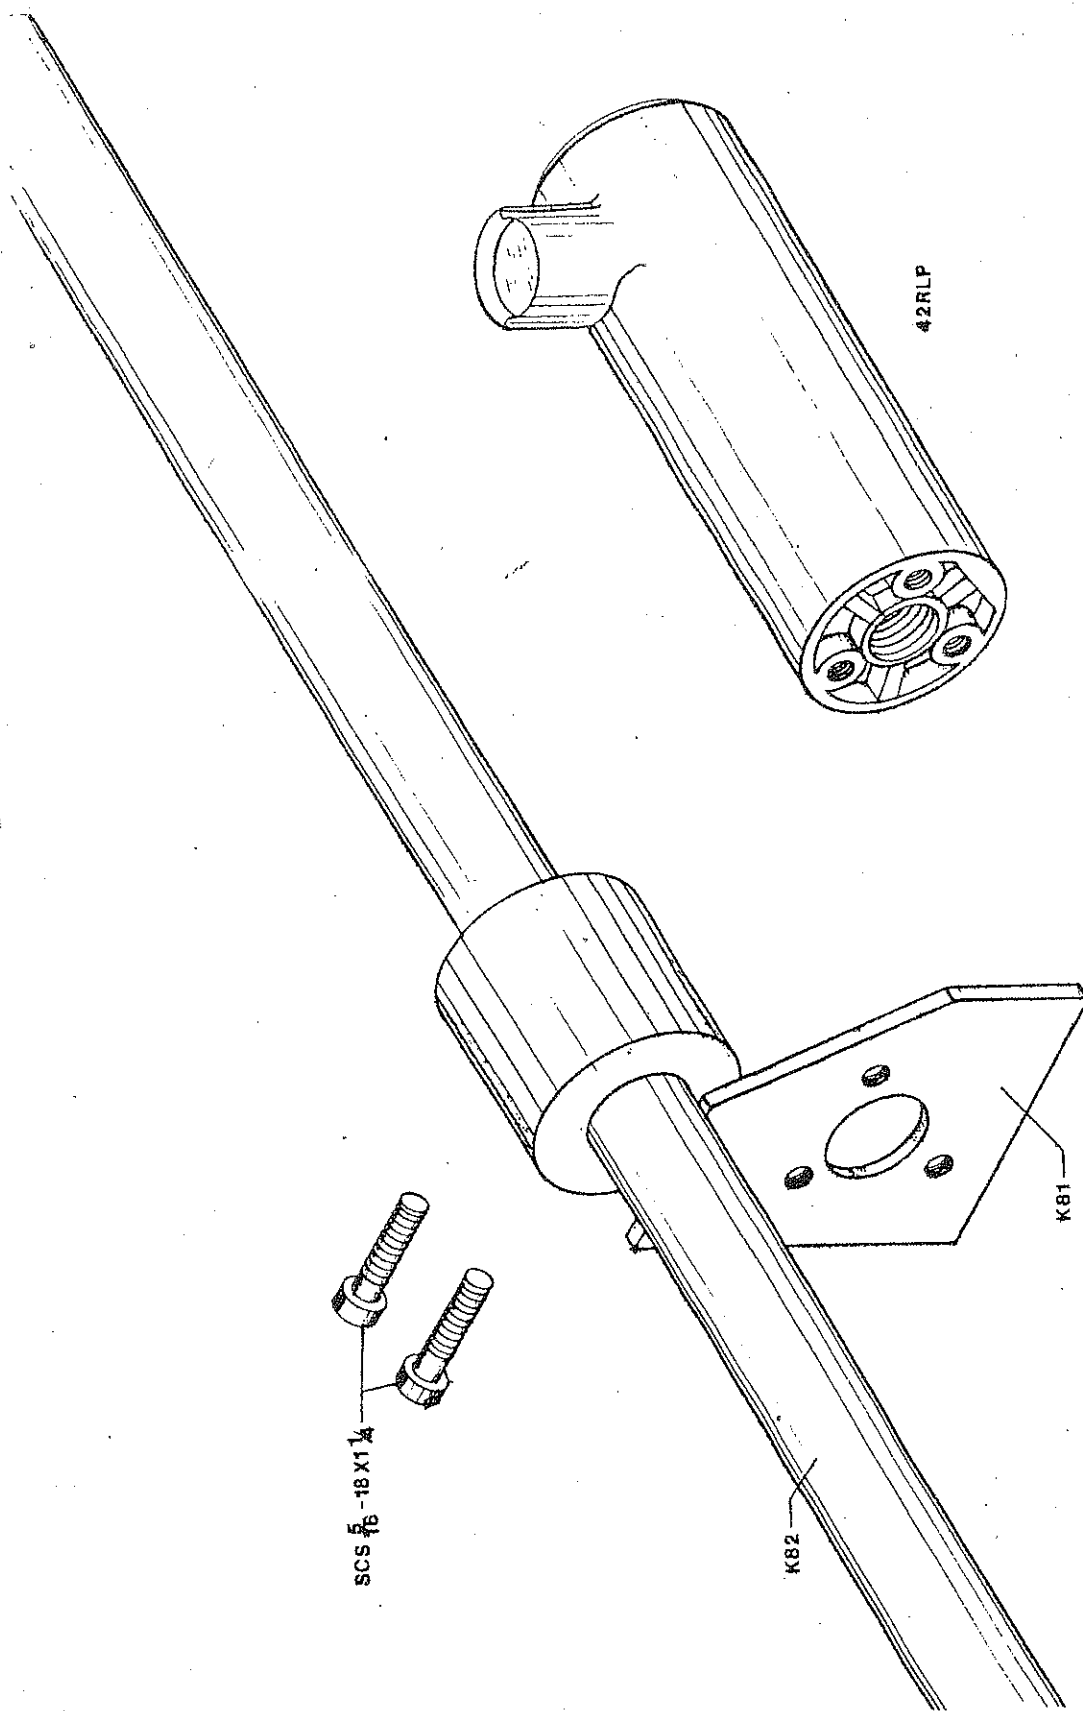


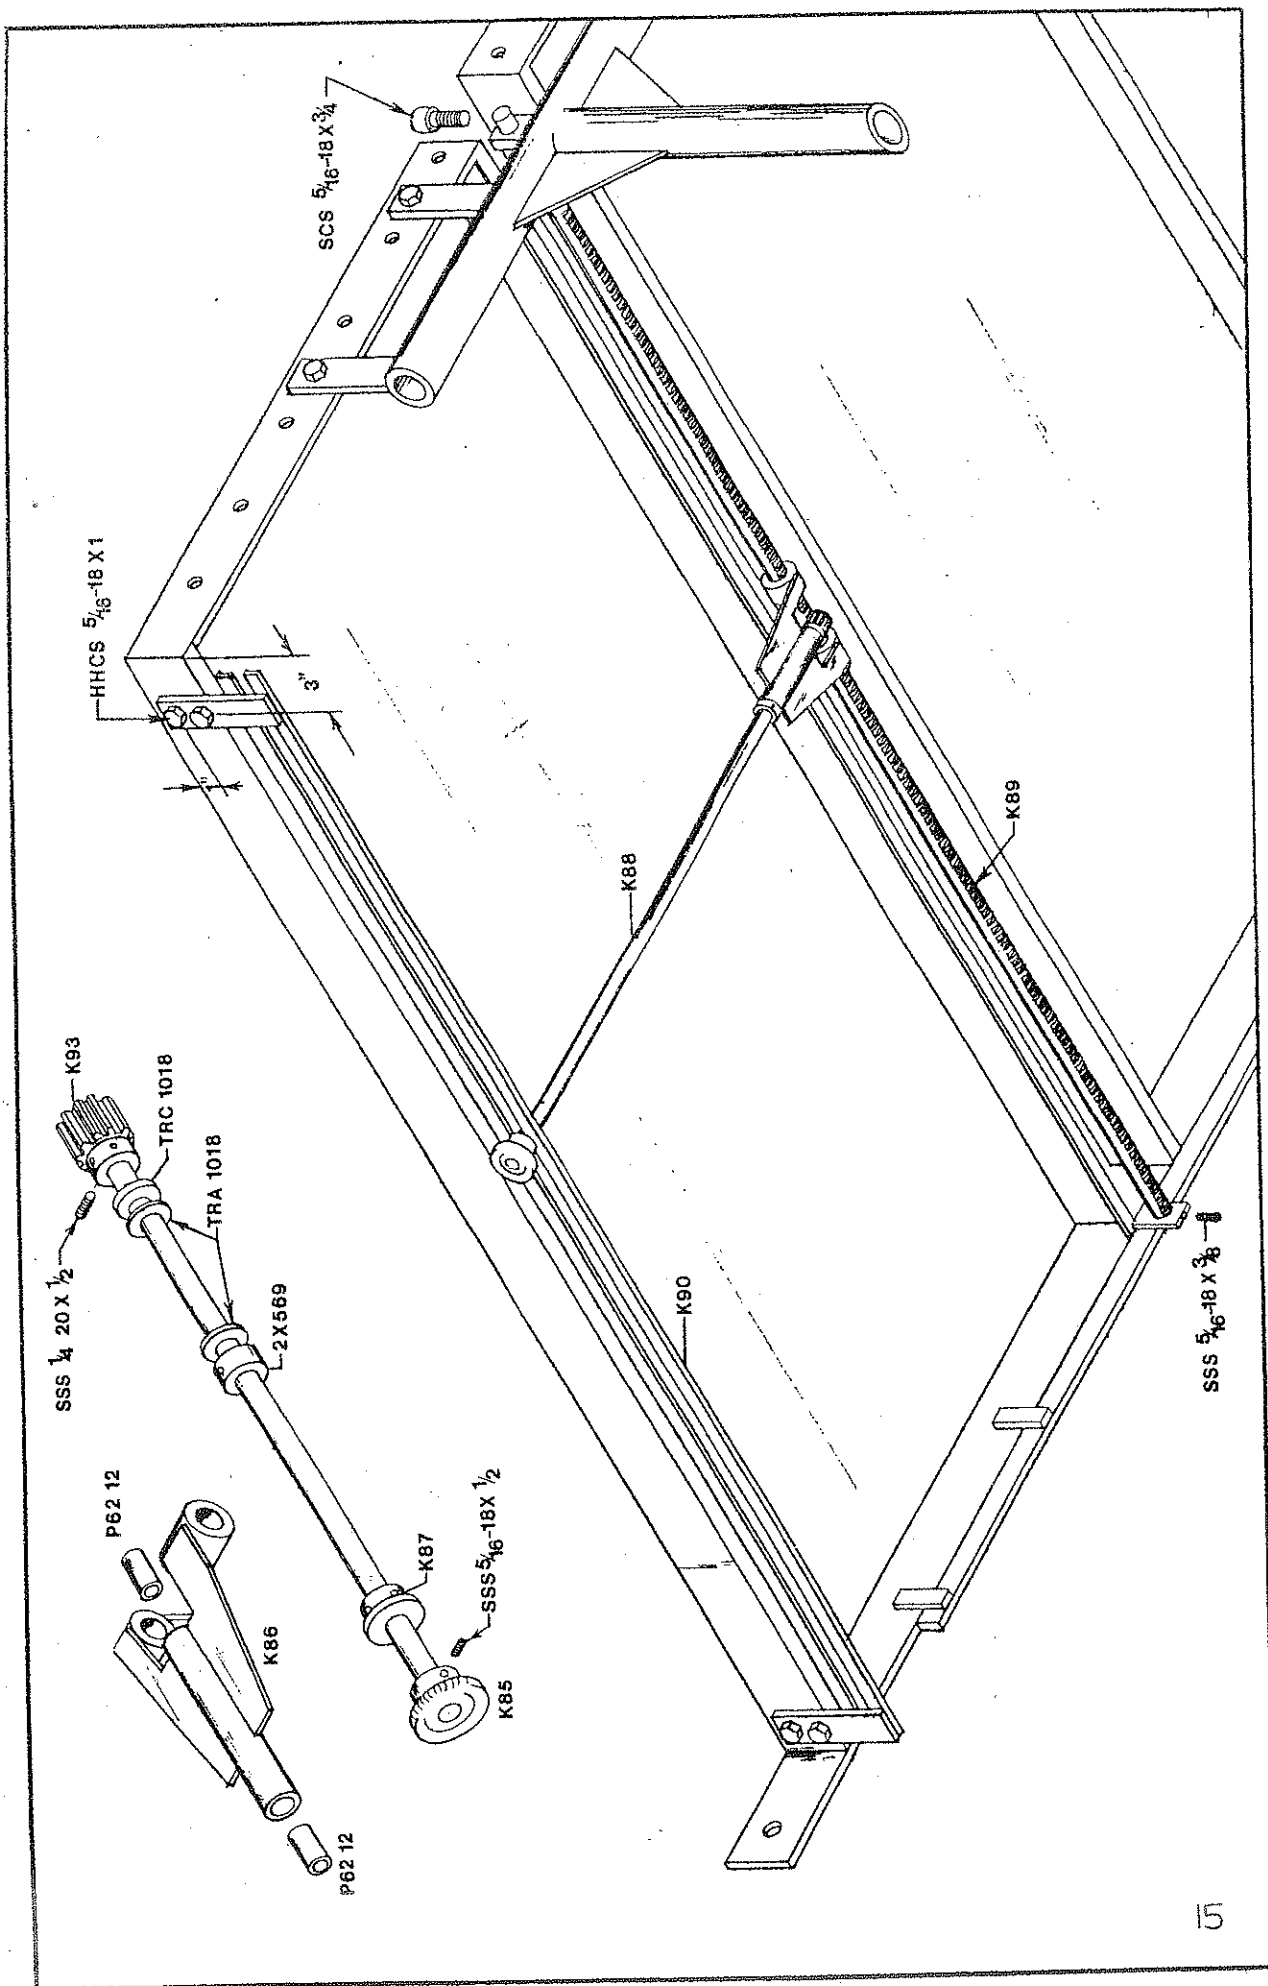


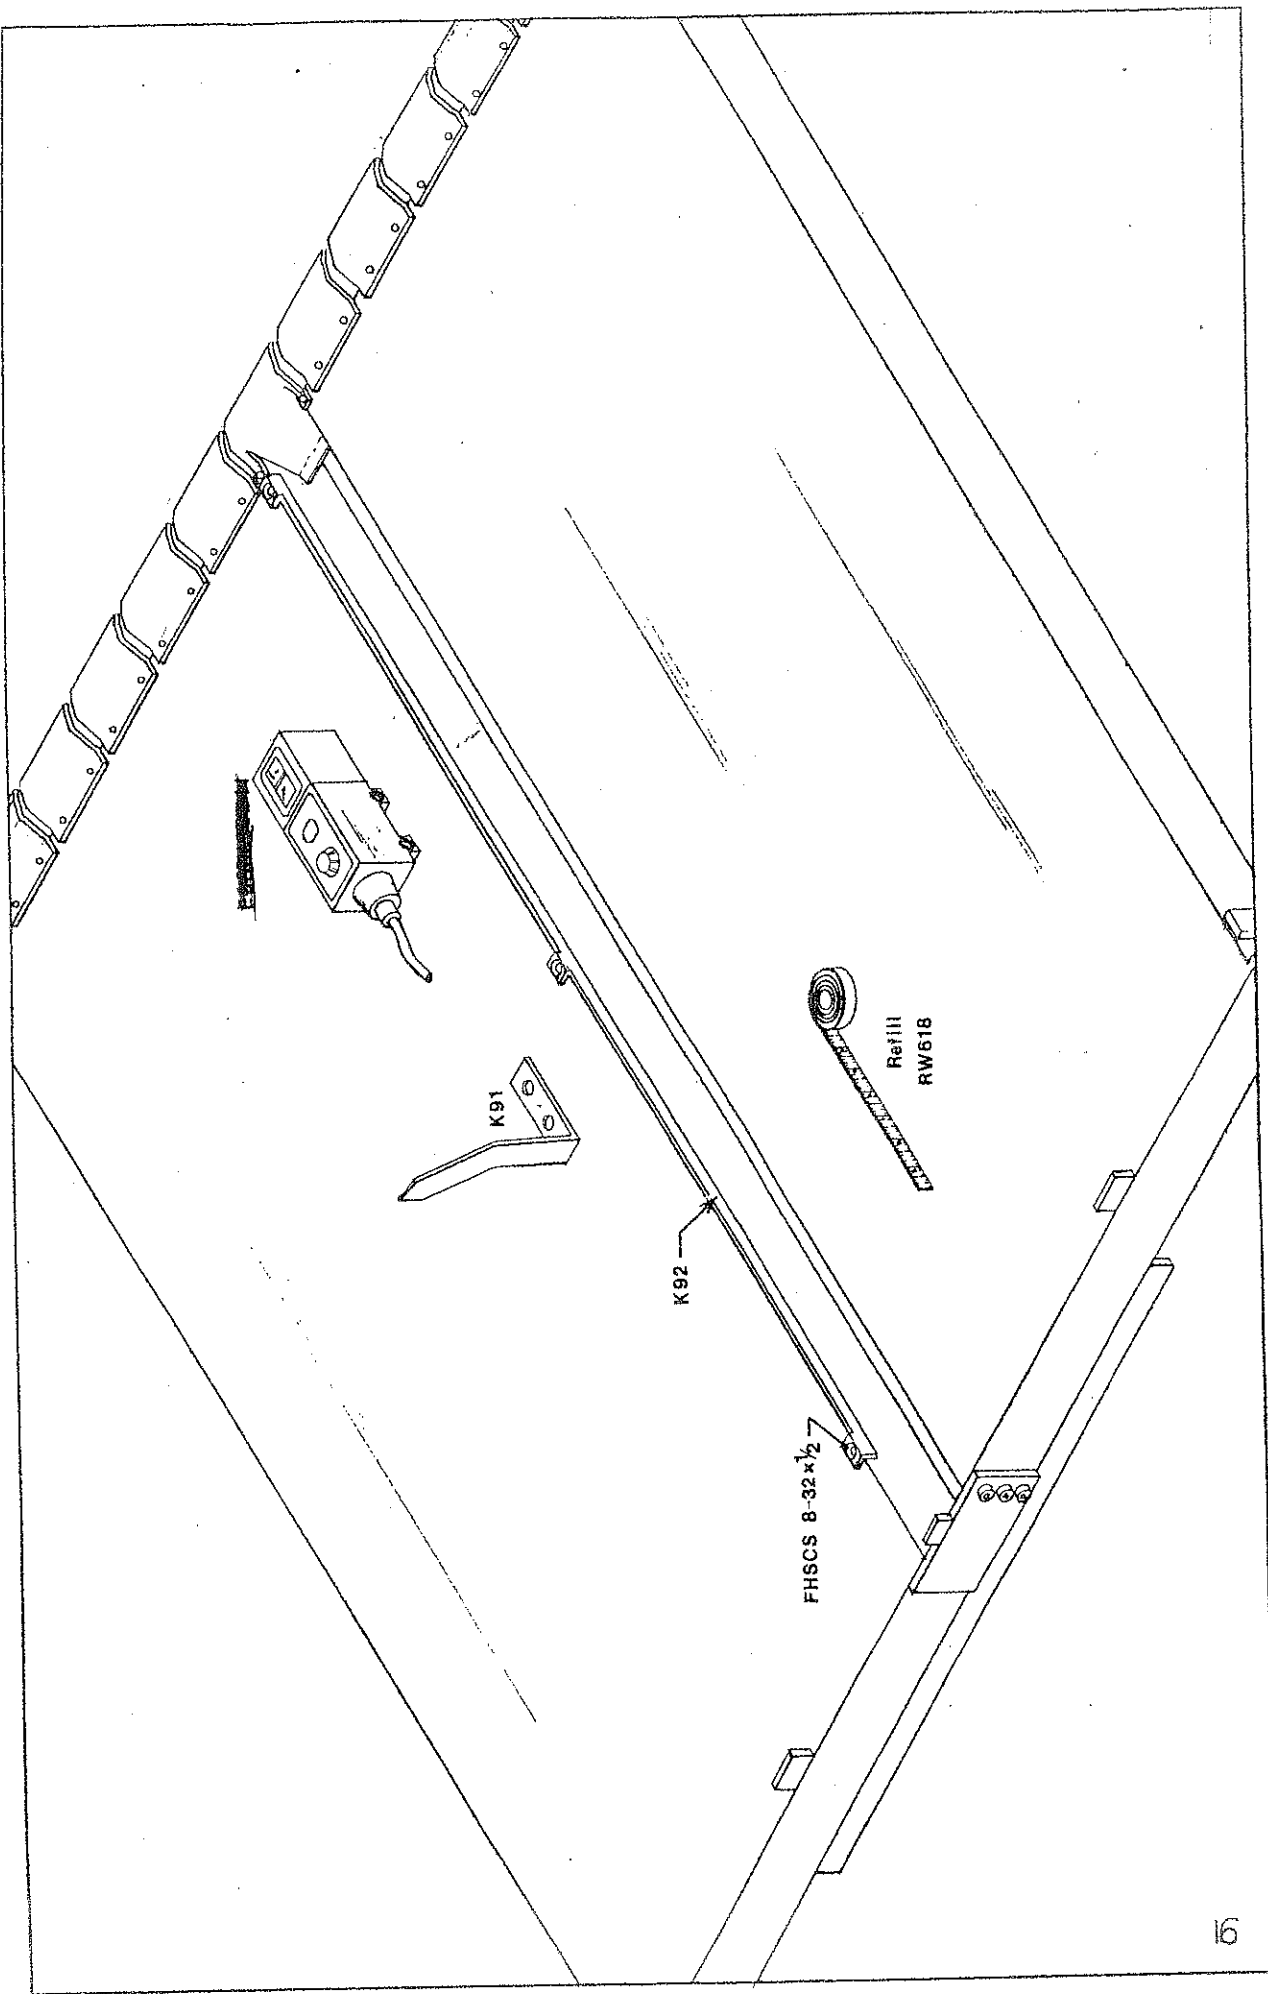


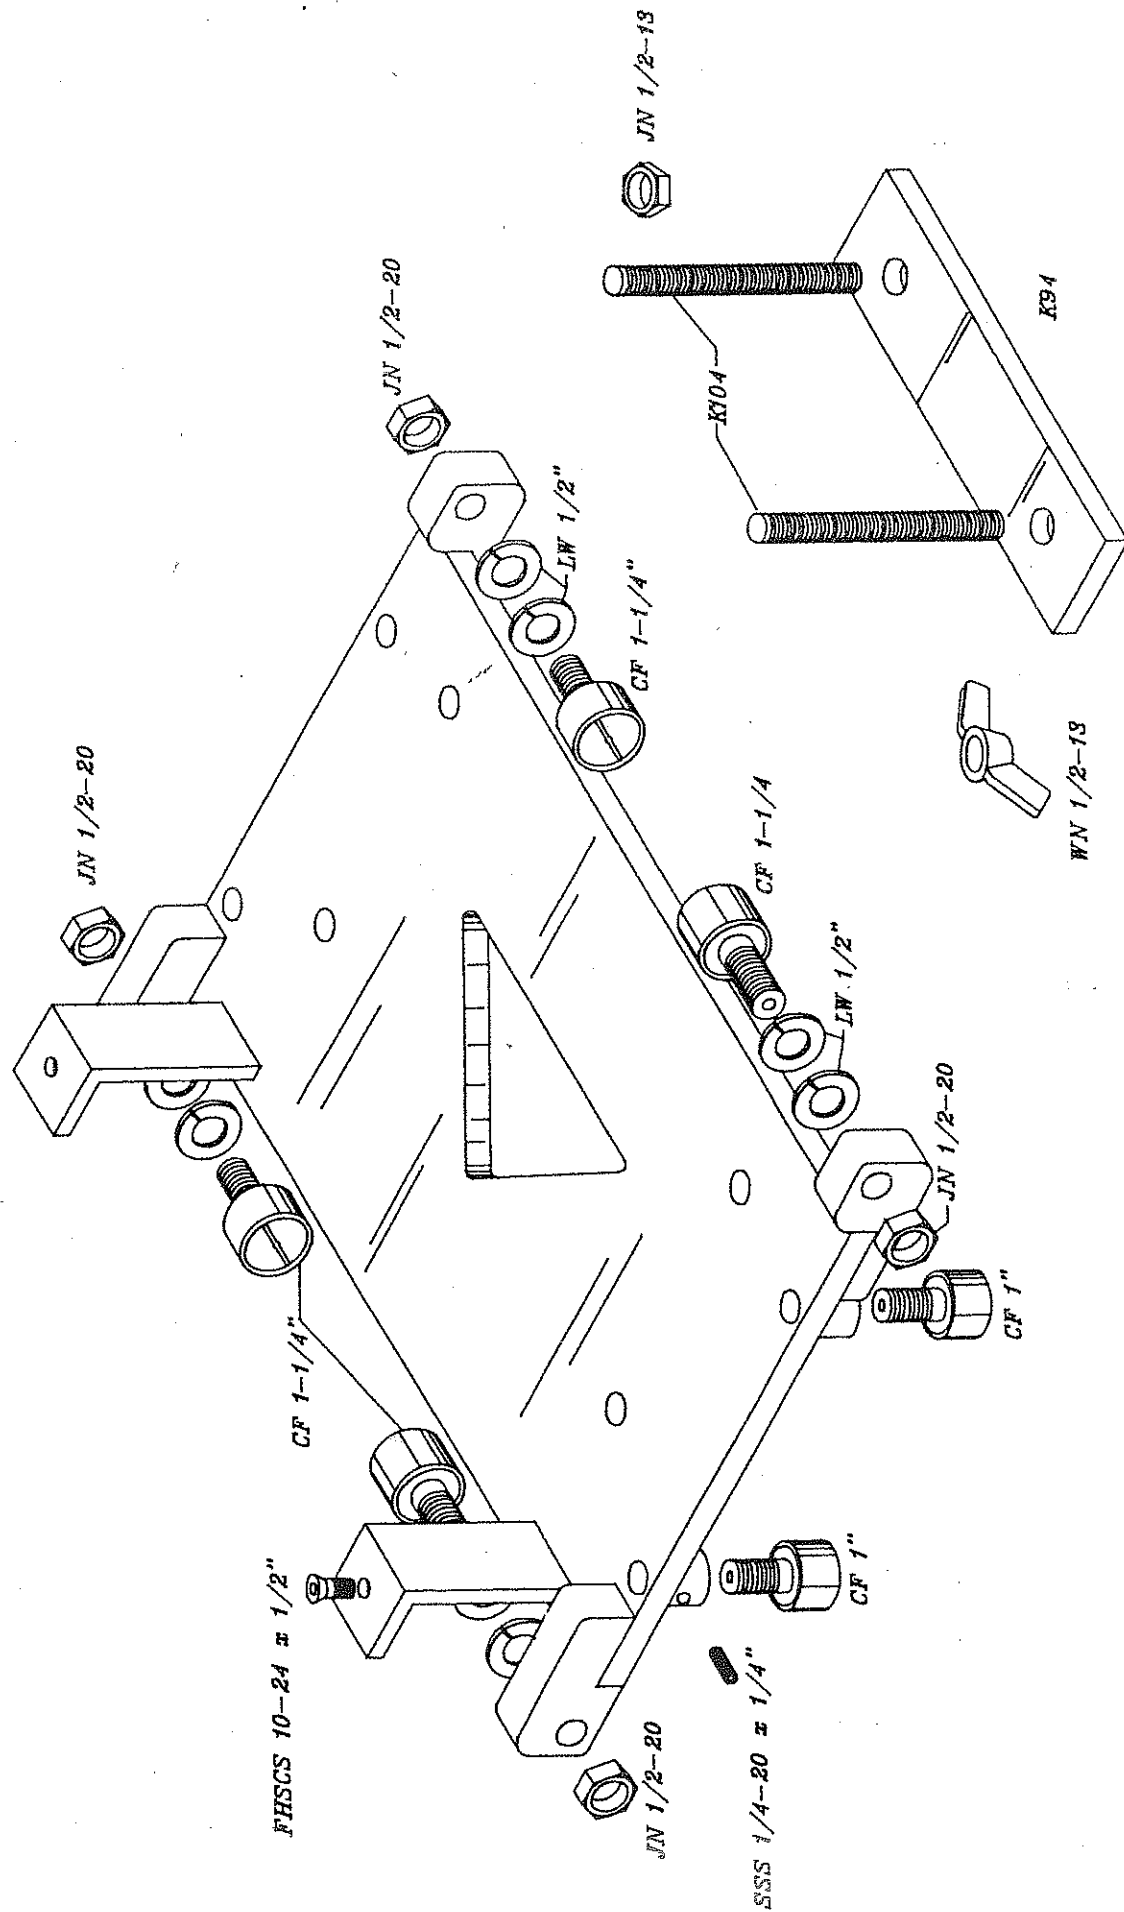


CCDIEP01

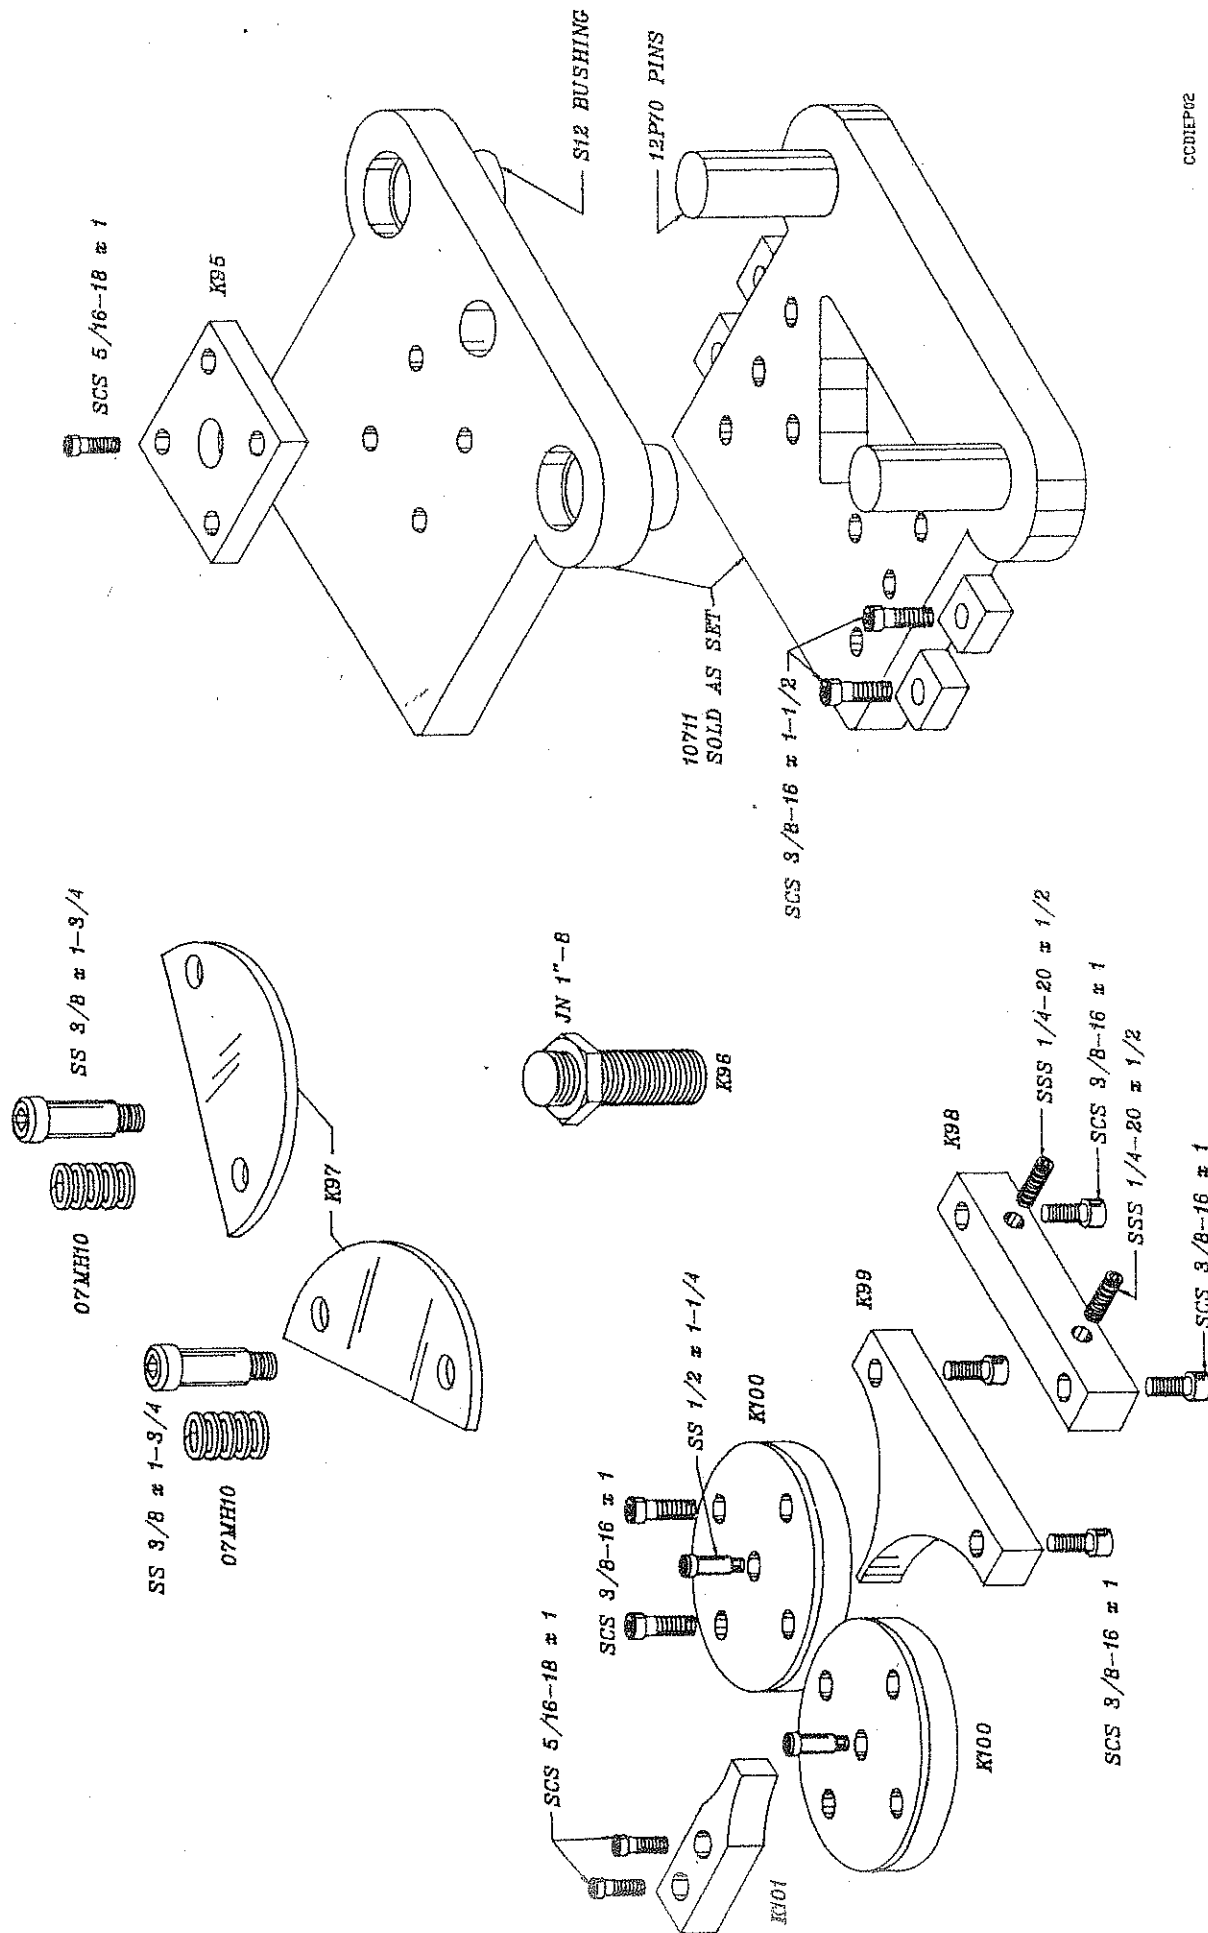

CCDIEP02

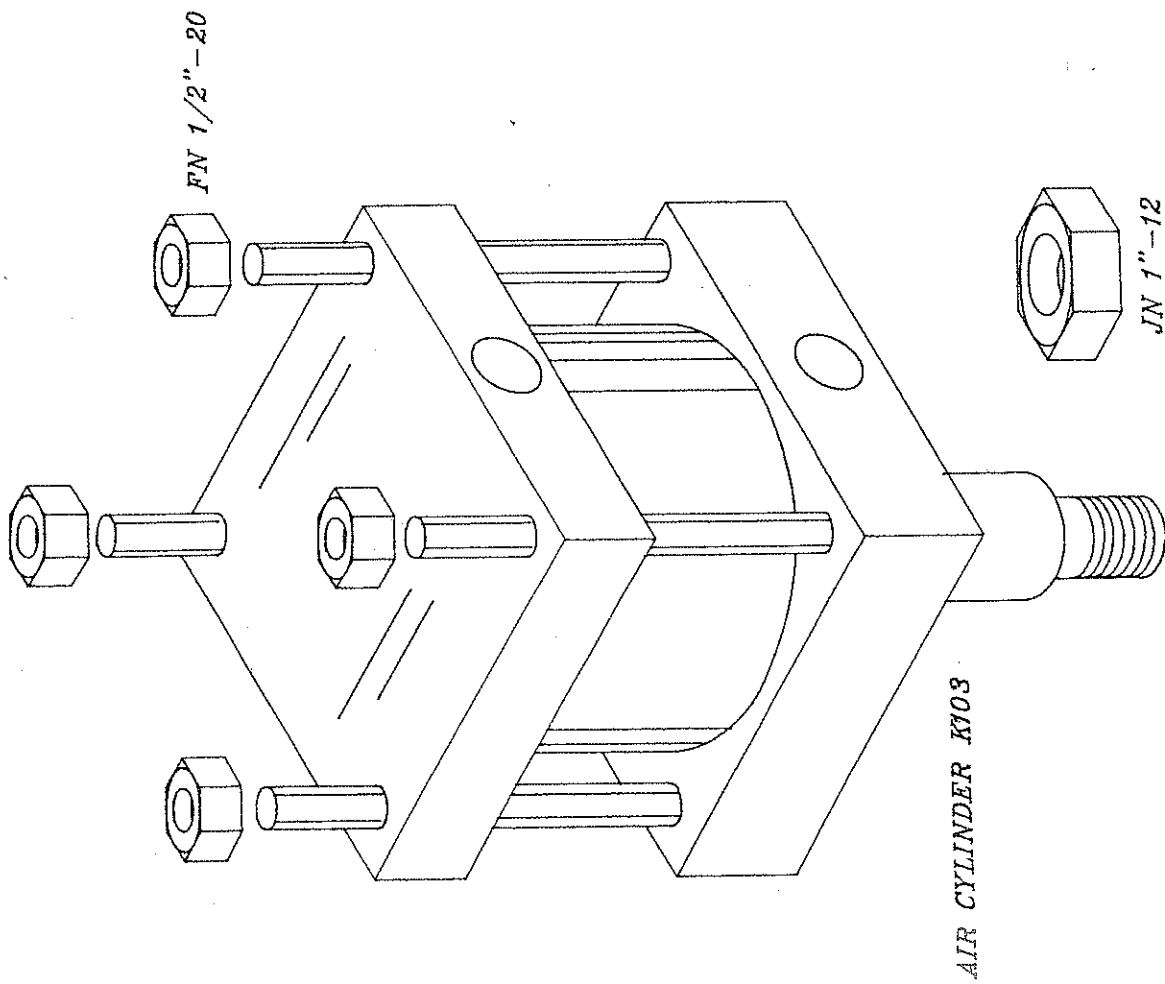


3340009





K102


SCS 10-24 x 3/4"

CCDIEP03


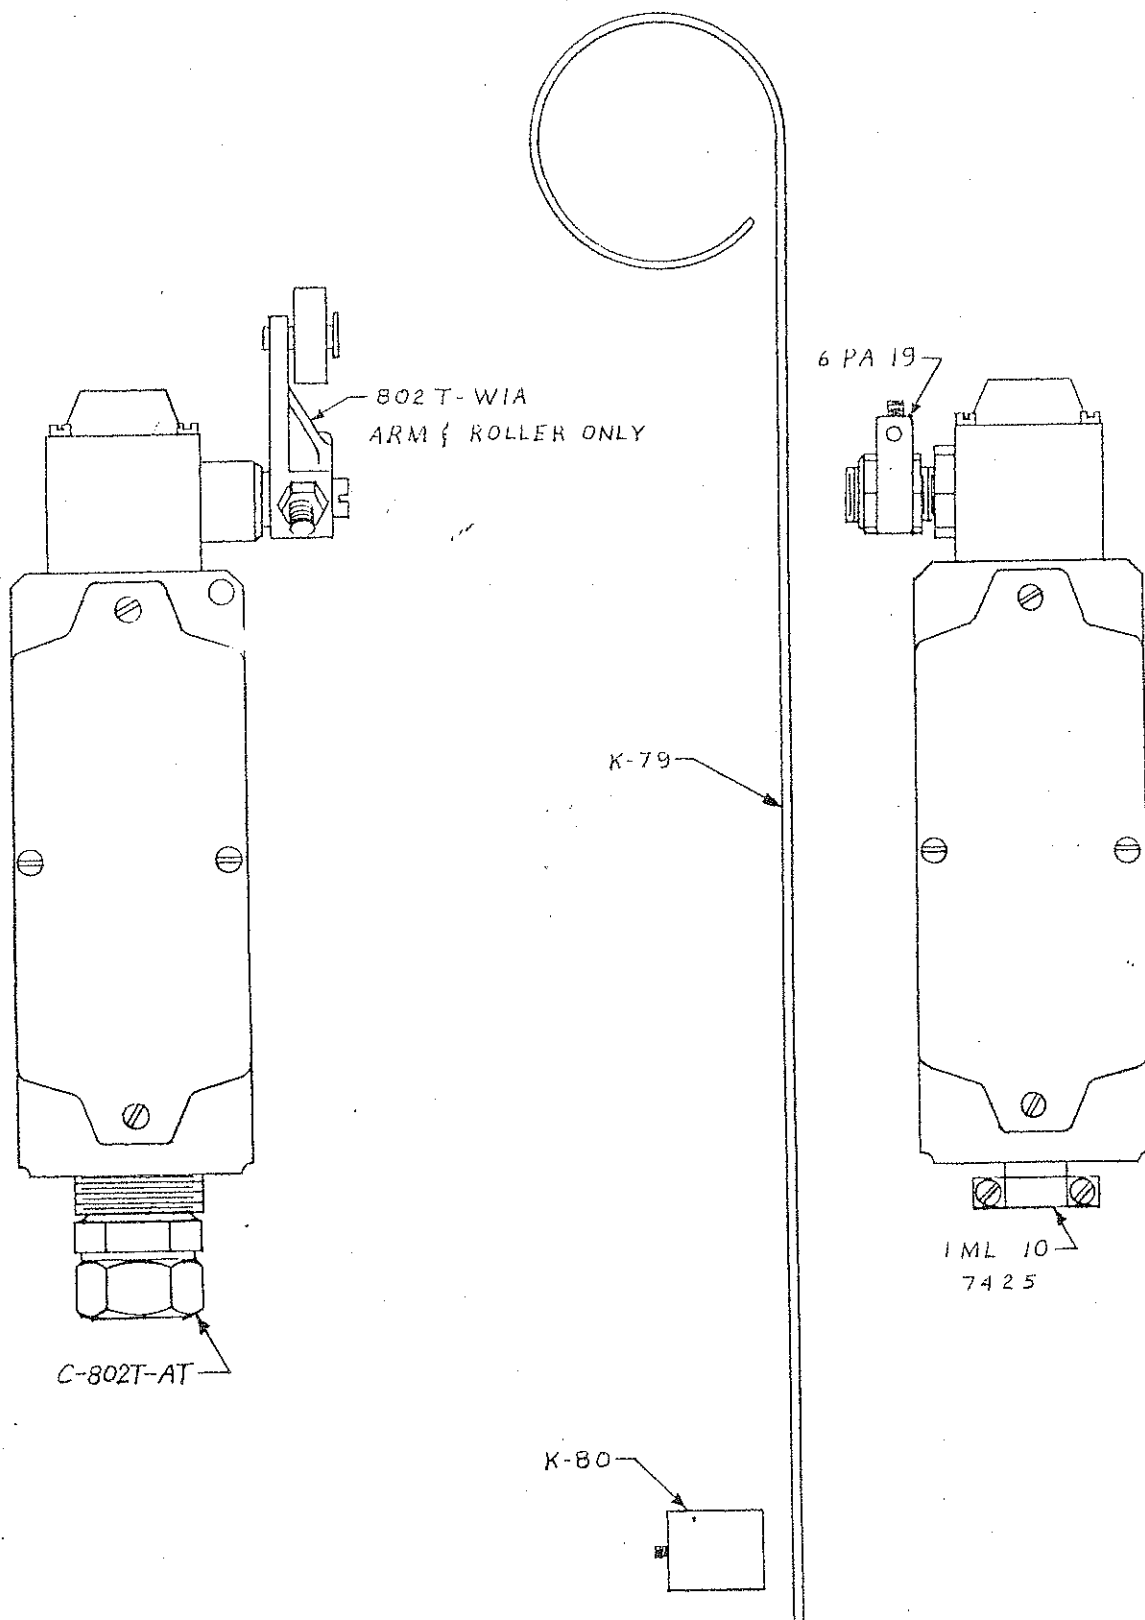


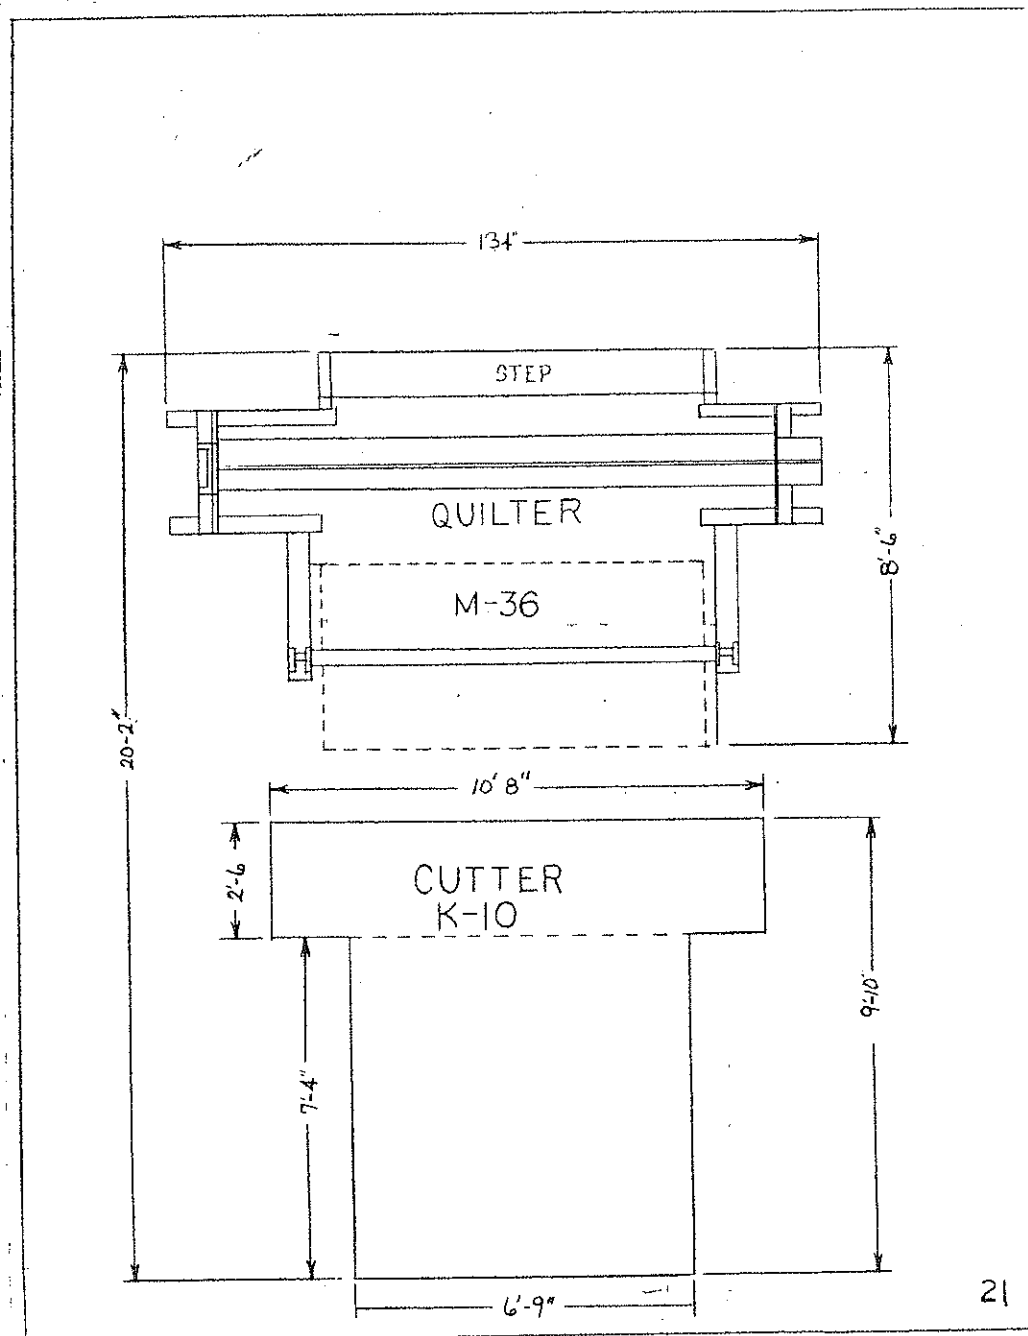

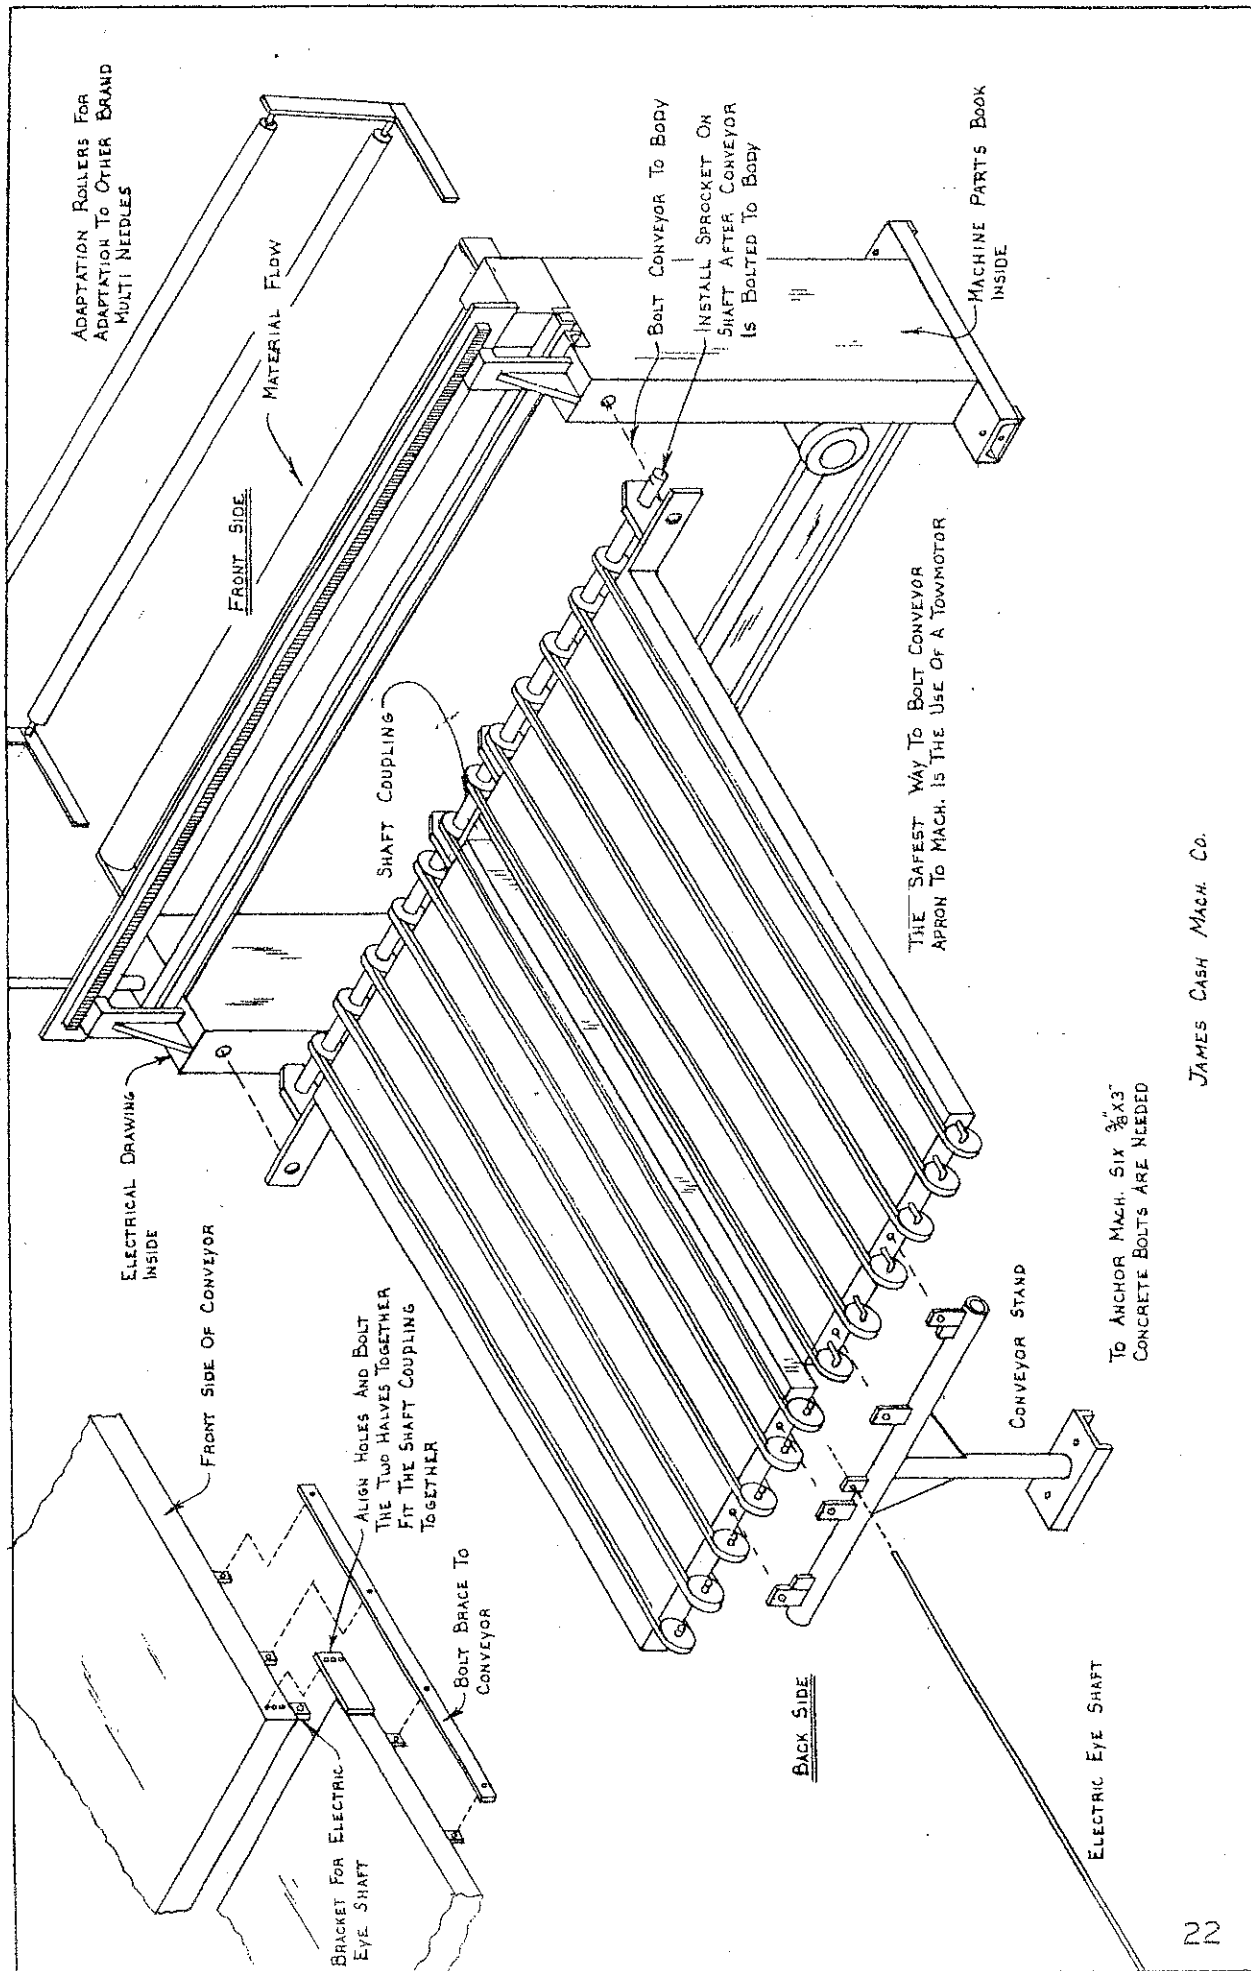

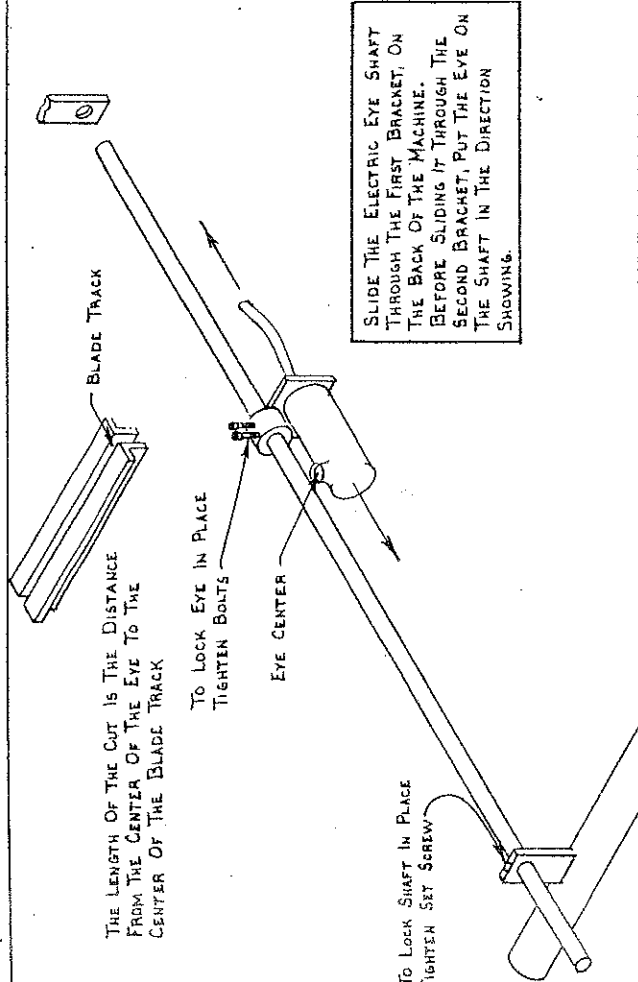

SLIDE THE ELECTRIC EYE SHAFT THROUGH THE FIRST BRACKET, ON THE BACK OF THE MACHINE. BEFORE SLIDING IT THROUGH THE SECOND BRACKET, PUT THE EYE ON THE SHAFT IN THE DIRECTION SHOWN.

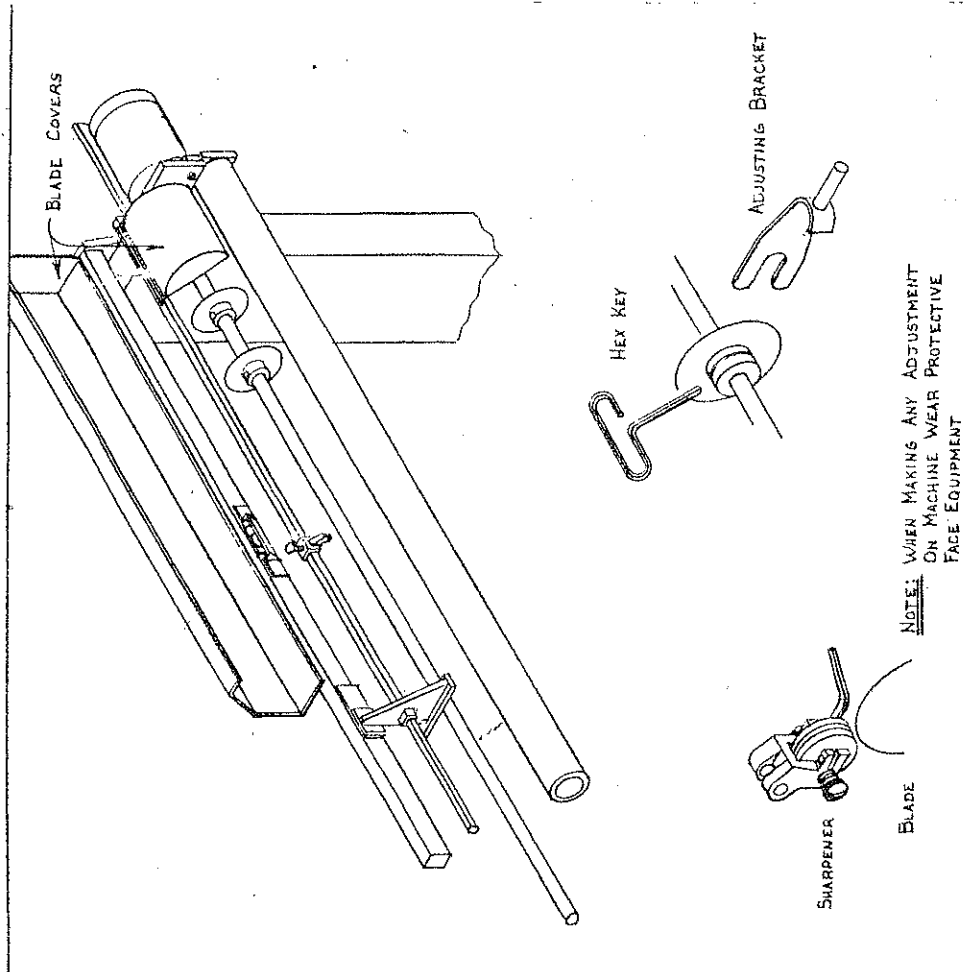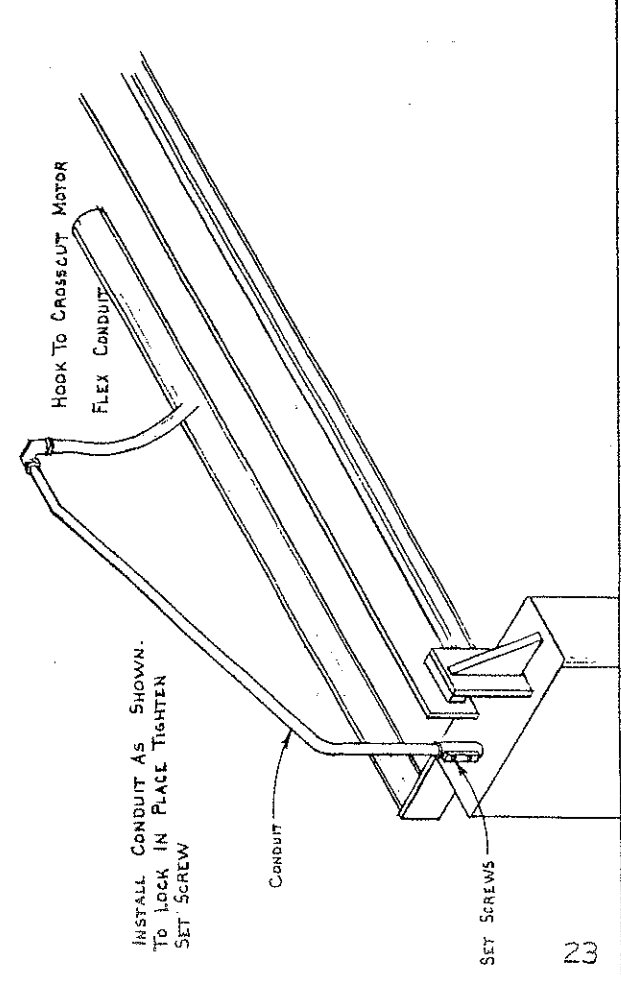

TO SHARPEN SLITTER BLADES LIFT COVER AND LOCK IN PLACE. LOOSEN THUMB SCREW ON SHARPENER AND SLIDE TO BLADE BEING SHARPENED (CENTER OF STONES TO CENTER OF BLADES) WHILE APPLYING PRESSURE TO STONES HANDLE. PRESS BUTTON MARKED SLITTER THIS WILL START BLADE MOTOR ONLY. WHEN SHARPENED MOVE STONES TO SIDE, LOWER COVER.

NOTE: WHEN MAKING ANY ADJUSTMENT ON MACHINE WEAR PROTECTIVE FACE EQUIPMENT

TO ADJUST SLITTER BLADES TURN MAIN POWER SWITCH TO OFF POSITION. LIFT BOTH BLADE COVERS AND LOCK IN PLACE. REMOVE HEX KEY FROM HOLDER BRACKET AND LOOSEN CLAMPING BOLTS. USING THE ADJUSTING BRACKET SLIDE THE BLADES TO DESIRED WIDTH OF CUT. WHEN IN POSITION RETIGHTEN BOLTS, LOWER COVERS, AND TURN POWER ON.

JAMES CASH MACH. CO.
CROSS CUT KNIFE ASSEMBLY

